


# STEELCRAFT®

## CE-SERIES DOORS GLASS LITES (Maximum 1/2" Thick Glass)

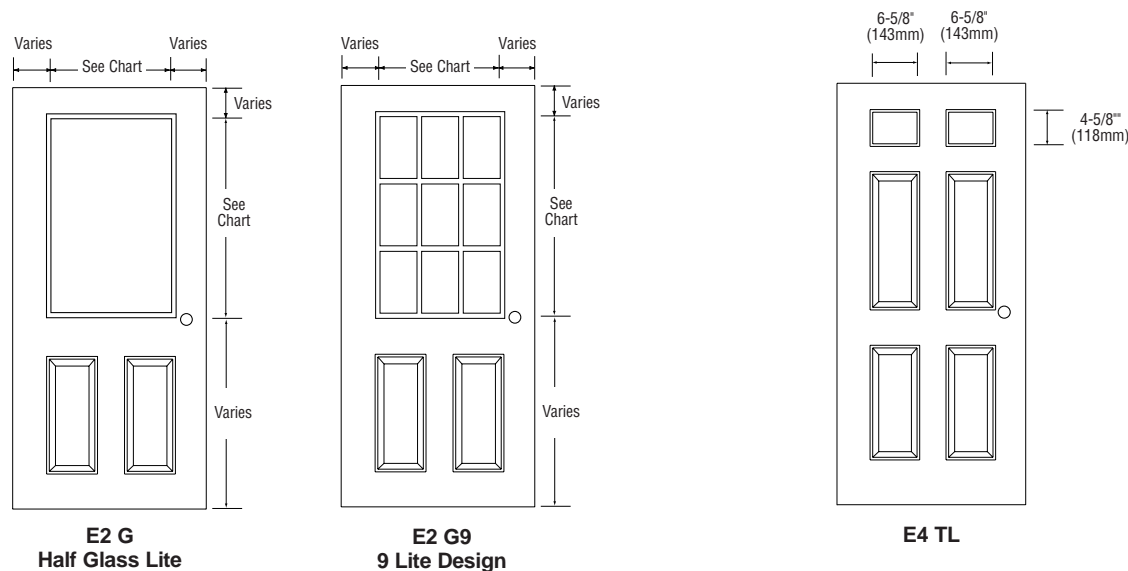

EMBOSSED DOOR LITES

\*Dimensions are shown to the Exposed Glass Size

### GLASS LITE SIZES (FOR E2 G, E2 G9)

The following critical dimensions apply to the standard CE Half Glass and 9 Lite window designs:

Window Widths	Door Widths	
	2'6" thru 2'8"	2'10" thru 3'8"
EGS =	18 5/8"	20 5/8"
GCS =	19 3/4"	21 3/4"
DCS =	20 7/32"	22 7/32"

Window Heights	Door Heights	
	6'8" & 7'0"	8'0"
EGS =	34 5/8"	46 5/8"
GCS =	35 3/4"	47 3/4"
DCS =	36 7/32"	48 7/32"

**Note:** EGS = Exposed Glass Size  
GCS = Glass Cutting Size  
DCS = Door Cutout Size

### GLASS LITE SIZES (FOR E4 TL)

The following critical dimensions apply to the standard E6 (individual) dual vision lite window design:

Window Widths	Door Widths
	2'6" thru 3'8"
EGS =	6 5/8"
GCS =	7 3/4"
DCS =	8 7/32"

Window Heights	Door Heights
	6'8", 7'0", & 8'0"
EGS =	4 5/8"
GCS =	5 3/4"
DCS =	6 7/8"


**Note:** EGS = Exposed Glass Size  
GCS = Glass Cutting Size  
DCS = Door Cutout Size

### GLAZING BEAD SYSTEM:

1/4" (6mm) thick glass lites are available as standard with the Steelcraft Dezigner® trim system.

1/2" (13mm) thick insulated glass lites, are available as an option with the Steelcraft Dezigner trim system for insulated glass.

### GLAZING DETAILS:

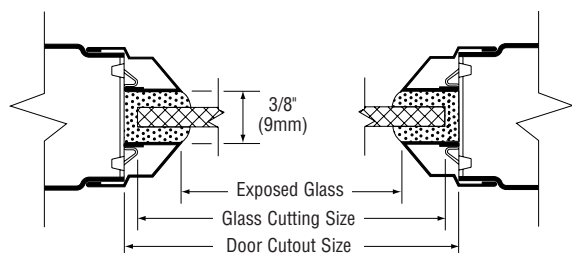

Details are subject to change without prior notice.