


# STEELCRAFT®

## NARROW LITE Fixed Sizes (Maximum 1/2" Thick Glass)

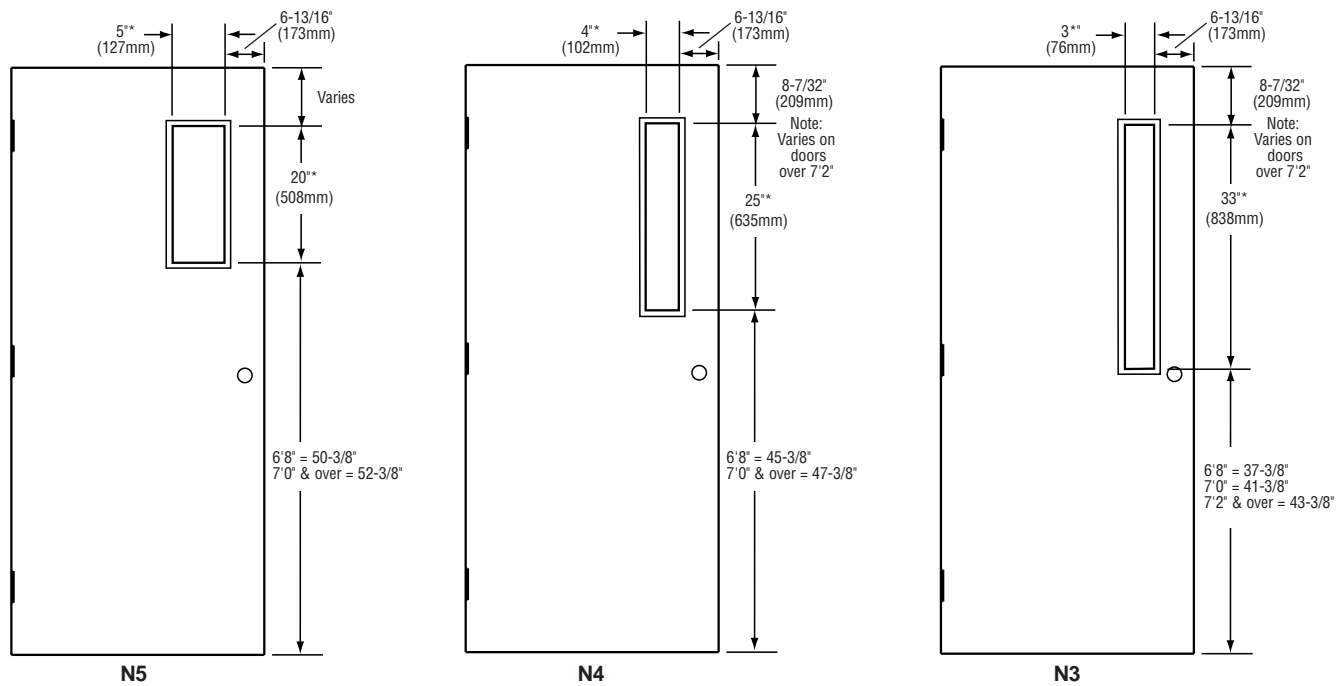

FLUSH DOOR LITES

\*Dimensions are to Exposed Glass Size

### FIXED NARROW LITE DOOR DESIGN:

Designation for a door with a long narrow lite located along the lock edge of the door. The following variations in the Narrow Lite designs are covered on this sheet, and are available as standard:

- **N3 Lite:** door prepared for a 3" (76mm) wide and 33" (838mm) high glass lite (exposed glass size).
- **N4 Lite:** door prepared for a 4" (102mm) wide and 25" (635 mm) high glass lite (exposed glass size).
- **N5 Lite:** door prepared for a 5" (127mm) wide and 20" (508mm) high glass lite (exposed glass size).

### GLAZING BEAD SYSTEM:

1/4" (6mm) thick glass lites are available as standard with the Steelcraft Dezigner® trim system.

1/2" (13mm) thick insulated glass lites, are available as an option with the Steelcraft Dezigner Trim System for insulated glass.

Insulated glass lites thicker than 1/2" (13mm) are available as an option with specially designed overlapping steel trim.

### ORDERING NOMENCLATURE:

The door ordering nomenclature described on page D-2, is suffixed with the letter:

- **N3** – 3" (76mm) wide and 33" (838mm) high glass lite (exposed glass size).
- **N4** – 4" (102mm) wide and 25" (635mm) high glass lite (exposed glass size).
- **N5** – 5" (127mm) wide and 20" (508mm) high glass lite (exposed glass size).

### DOOR SERIES AVAILABLE:


Narrow Lite kits are available for the following door series in all of their standard options and gages: L & B-Series.

### GLASS LITE SIZES:


The following critical dimensions apply to the standard Steelcraft N3, N4 and N5-Lite window designs:

	Glass Designs		
	N5	N4	N3
<b>Window Widths</b>			
Exposed Glass Size =	5"	4"	3"
Glass Cutting Size =	6 1/4"	5 1/4"	4 1/4"
Door Cutout Size =	6 5/8"	5 5/8"	4 5/8"
<b>Window Heights</b>			
Exposed Glass Size =	20"	25"	33"
Glass Cutting Size =	21 1/4"	26 1/4"	34 1/4"
Door Cutout Size =	21 5/8"	26 5/8"	34 5/8"

### GLAZING DETAILS:

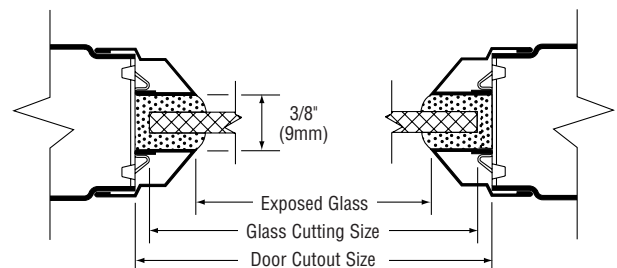

Details are subject to change without prior notice.

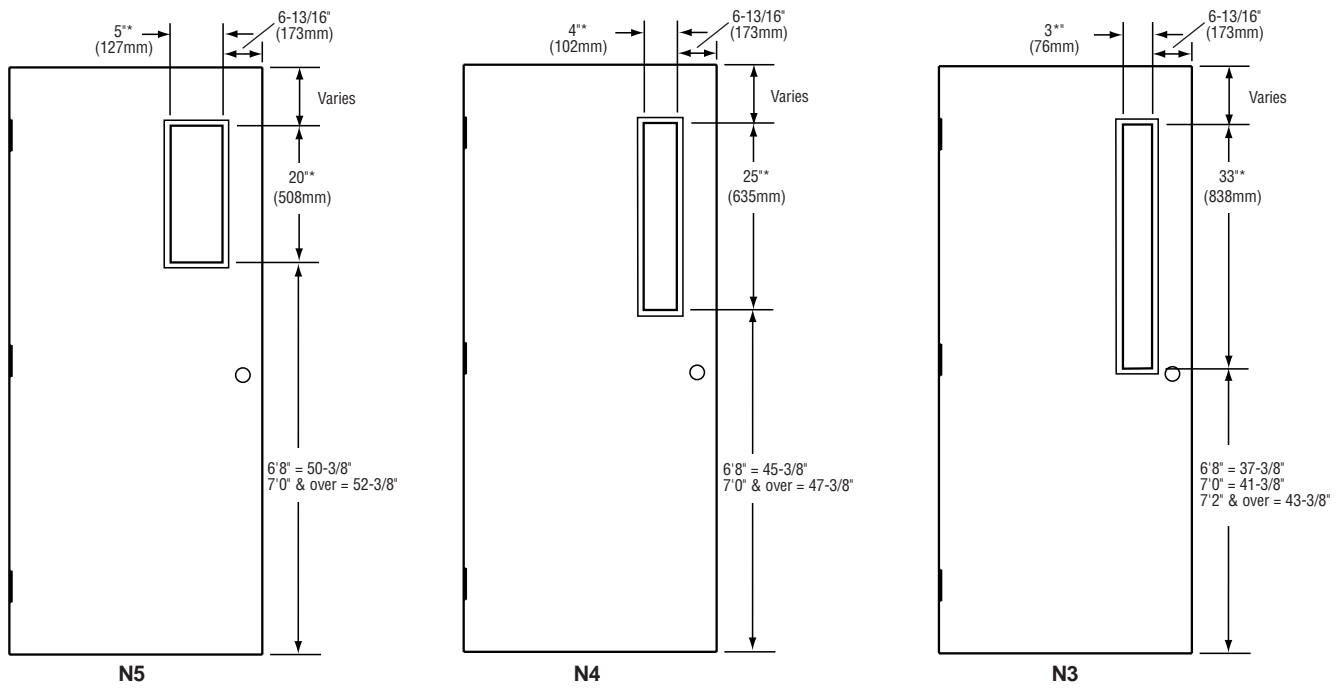

\*Dimensions are to Exposed Glass Size

### FIXED NARROW LITE DOOR DESIGN:

Designation for a door with a long narrow lite located along the lock edge of the door. The following variations in the Narrow Lite designs are covered on this sheet, and are available as standard:

- **N3 Lite:** door prepared for a 3" (76mm) wide and 33" (838mm) high glass lite (exposed glass size).
- **N4 Lite:** door prepared for a 4" (102mm) wide and 25" (635 mm) high glass lite (exposed glass size).
- **N5 Lite:** door prepared for a 5" (127mm) wide and 20" (508mm) high glass lite (exposed glass size).

### GLAZING BEAD SYSTEM:

1/4" (6mm) thick glass lites are available as standard with the Steelcraft Dezigner® trim system.

1/2" (13mm) thick insulated glass lites, are available as an option with the Steelcraft Dezigner Trim System for insulated glass.

Insulated glass lites thicker than 1/2" (13mm) are available as an option with specially designed overlapping steel trim.

### ORDERING NOMENCLATURE:

The door ordering nomenclature described on page D-2, is suffixed with the letter:

- **N3** – 3" (76mm) wide and 33" (838mm) high glass lite (exposed glass size).
- **N4** – 4" (102mm) wide and 25" (635mm) high glass lite (exposed glass size).
- **N5** – 5" (127mm) wide and 20" (508mm) high glass lite (exposed glass size).

### DOOR SERIES AVAILABLE:

Narrow Lite kits are available for the following door series in all of their standard options and gages: L & B-Series.

### GLASS LITE SIZES:

The following critical dimensions apply to the standard Steelcraft N3, N4 and N5-Lite window designs:

	Glass Designs		
	N5	N4	N3
<b>Window Widths</b>			
Exposed Glass Size =	5"	4"	3"
Glass Cutting Size =	6 1/4"	5 1/4"	4 1/4"
Door Cutout Size =	6 5/8"	5 5/8"	4 5/8"
<b>Window Heights</b>			
Exposed Glass Size =	20"	25"	33"
Glass Cutting Size =	21 1/4"	26 1/4"	34 1/4"
Door Cutout Size =	21 5/8"	26 5/8"	34 5/8"

### GLAZING DETAILS:

