



STEELCRAFT®

HALF GLASS LITE (Maximum 1/2" Thick Glass)

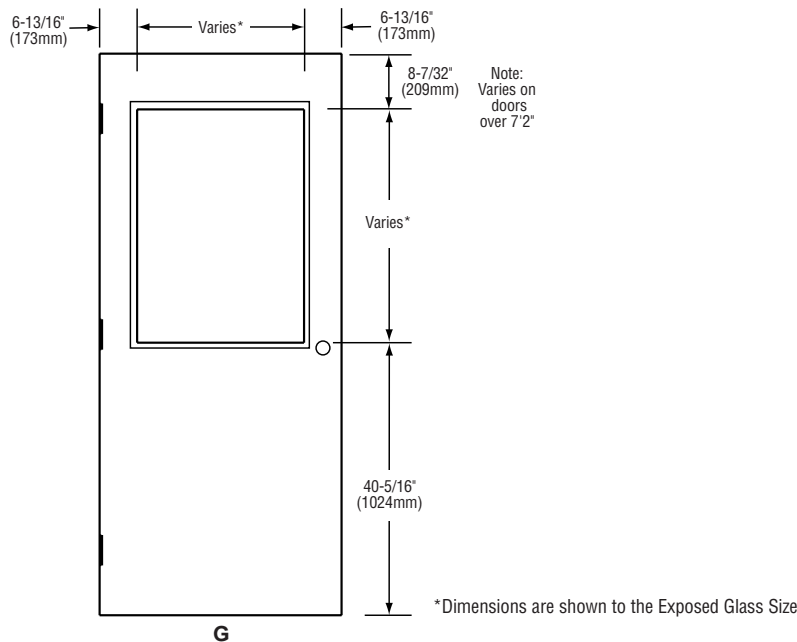

Note:
Varies on
doors
over 7'2"

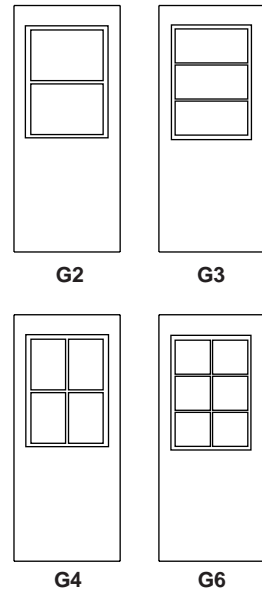

FLUSH DOOR LITES

HALF GLASS DOOR LITES:

Designation for a door with a glass lite located in the top half of the door face. The glass size will vary with the size of the door. However, for special sized doors, the next smaller glass size will be supplied.

Variations to the half glass windows can be accomplished by the addition of specially designed muntin bars attached to the Designer® trim system, and applied to the surface of the glass. Standard options are as follows:

- **G2** – one (1) horizontal muntin located on the vertical centerline, and dividing the G-Lite into two (2) equal windows.
- **G3** – two (2) horizontal muntin dividing the G-Lite into three (3) equal windows.
- **G4** – one (1) horizontal, and one vertical muntin, each located on the respective centerline, and dividing the G-Lite into four (4) equal windows.
- **G6** – two (2) horizontal, and one vertical muntin, dividing the G-Lite into six (6) equal windows.

GLAZING BEAD SYSTEM:

1/4" (6mm) thick glass lites are available as standard with the Steelcraft Designer® trim system.

1/2" (13mm) thick insulated glass lites, are available as an option with the Steelcraft Designer trim system for insulated glass.

Insulated glass lites thicker than 1/2" (13mm) are available as an option with specially designed overlapping steel trim.

ORDERING NOMENCLATURE:

The door ordering nomenclature described on page D-2, is suffixed with the letter: **G, G2, G3, G4 or G6.**

DOOR SERIES AVAILABLE:

Half Glass kits are available for the following door series in all of their standard options and gages: L & B-Series.

GLASS LITE SIZES:


The following critical dimensions apply to the standard Steelcraft G Lite window designs:

Window Widths G	Door Widths						
	2'0"	2'4"	2'6"	3'0"	3'4"	3'6"	4'0"
EGS =	10 ¹ / ₄ "	14 ¹ / ₄ "	16 ¹ / ₄ "	22 ¹ / ₄ "	26 ¹ / ₄ "	28 ¹ / ₄ "	34 ¹ / ₄ "
GCS =	11 ³ / ₈ "	15 ³ / ₈ "	17 ³ / ₈ "	23 ³ / ₈ "	27 ³ / ₈ "	29 ³ / ₈ "	35 ³ / ₈ "
DCS =	11 ³ / ₄ "	15 ³ / ₄ "	17 ³ / ₄ "	23 ³ / ₄ "	27 ³ / ₄ "	29 ³ / ₄ "	35 ³ / ₄ "

Window Heights G	Door Heights					
	6'8"	6'10"	7'0"	7'2"	7'10"	8'0"
EGS =	30 ⁵ / ₈ "	32 ⁵ / ₈ "	34 ⁵ / ₈ "	36 ⁵ / ₈ "	44 ⁵ / ₈ "	46 ⁵ / ₈ "
GCS =	31 ³ / ₄ "	33 ³ / ₄ "	35 ³ / ₄ "	37 ³ / ₄ "	45 ³ / ₄ "	47 ³ / ₄ "
DCS =	32 ¹ / ₈ "	34 ¹ / ₈ "	36 ¹ / ₈ "	38 ¹ / ₈ "	46 ¹ / ₈ "	48 ¹ / ₈ "

Note: EGS = Exposed Glass Size
GCS = Glass Cutting Size
DCS = Door Cutout Size

GLAZING DETAILS:

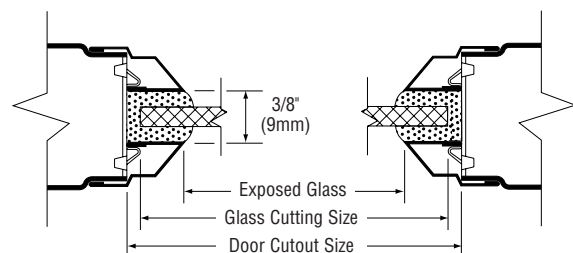


Details are subject to change without prior notice.

© 2000 Steelcraft Co.
Printed in USA

IR Security & Safety
Proven Source. Proven Solutions.™

Spec Manual
Rev. 5/2002

GLF4-1

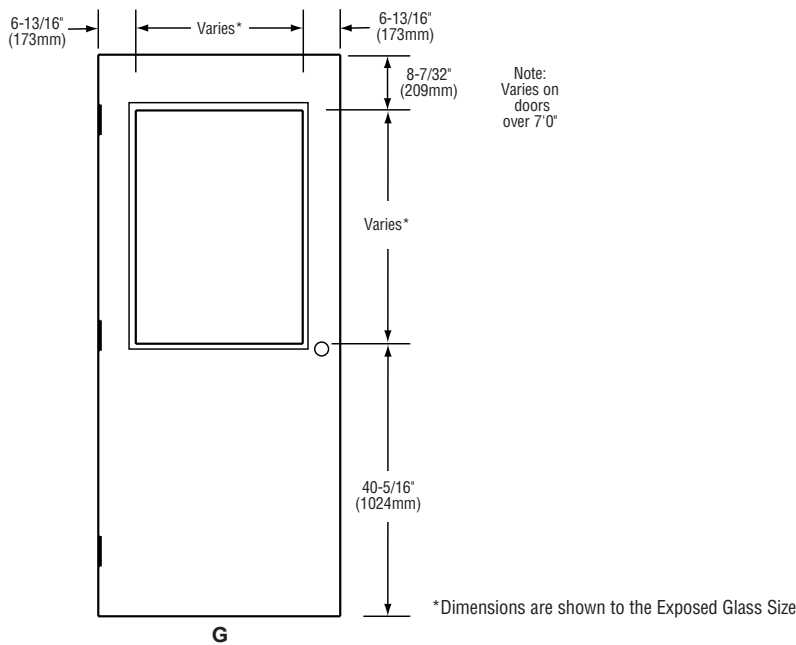

HALF GLASS DOOR LITES:

Designation for a door with a glass lite located in the top half of the door face. The glass size will vary with the size of the door, however, for special sized doors, the next smaller glass size will be supplied.

Variations to the half glass windows can be accomplished by the addition of specially designed muntin bars attached to the Designer® trim system, and applied to the surface of the glass. Standard options are as follows:

GLAZING BEAD SYSTEM:

1/4" (6mm) thick glass lites are available as standard with the Steelcraft Designer® trim system.

1/2" (13mm) thick insulated glass lites, are available as an option with the Steelcraft Designer trim system for insulated glass.

Insulated glass lites thicker than 1/2" (13mm) are available as an option with specially designed overlapping steel trim.

ORDERING NOMENCLATURE:

The door ordering nomenclature described on page D-2, is suffixed with the letter: **G, G2, G3, G4 or G6.**

DOOR SERIES AVAILABLE:

Half Glass kits are available for the following door series in all of their standard options and gages: **L & B-Series.**

GLASS LITE SIZES:

The following critical dimensions apply to the standard Steelcraft G Lite window designs:

Window Widths G	Door Widths						
	2'0"	2'4"	2'6"	3'0"	3'4"	3'6"	4'0"
EGS =	10 ¹ / ₄ "	14 ¹ / ₄ "	16 ¹ / ₄ "	22 ¹ / ₄ "	26 ¹ / ₄ "	28 ¹ / ₄ "	34 ¹ / ₄ "
GCS =	11 ³ / ₈ "	15 ³ / ₈ "	17 ³ / ₈ "	23 ³ / ₈ "	27 ³ / ₈ "	29 ³ / ₈ "	35 ³ / ₈ "
DCS =	11 ³ / ₄ "	15 ³ / ₄ "	17 ³ / ₄ "	23 ³ / ₄ "	27 ³ / ₄ "	29 ³ / ₄ "	35 ³ / ₄ "

Window Heights G	Door Heights					
	6'8"	6'10"	7'0"	7'2"	7'10"	8'0"
EGS =	30 ⁵ / ₈ "	32 ⁵ / ₈ "	34 ⁵ / ₈ "	36 ⁵ / ₈ "	44 ⁵ / ₈ "	46 ⁵ / ₈ "
GCS =	31 ³ / ₄ "	33 ³ / ₄ "	35 ³ / ₄ "	37 ³ / ₄ "	45 ³ / ₄ "	47 ³ / ₄ "
DCS =	32 ¹ / ₈ "	34 ¹ / ₈ "	36 ¹ / ₈ "	38 ¹ / ₈ "	46 ¹ / ₈ "	48 ¹ / ₈ "

Note: EGS = Exposed Glass Size
GCS = Glass Cutting Size
DCS = Door Cutout Size

GLAZING DETAILS:

