


## Dutch Doors (Non-Labeled)

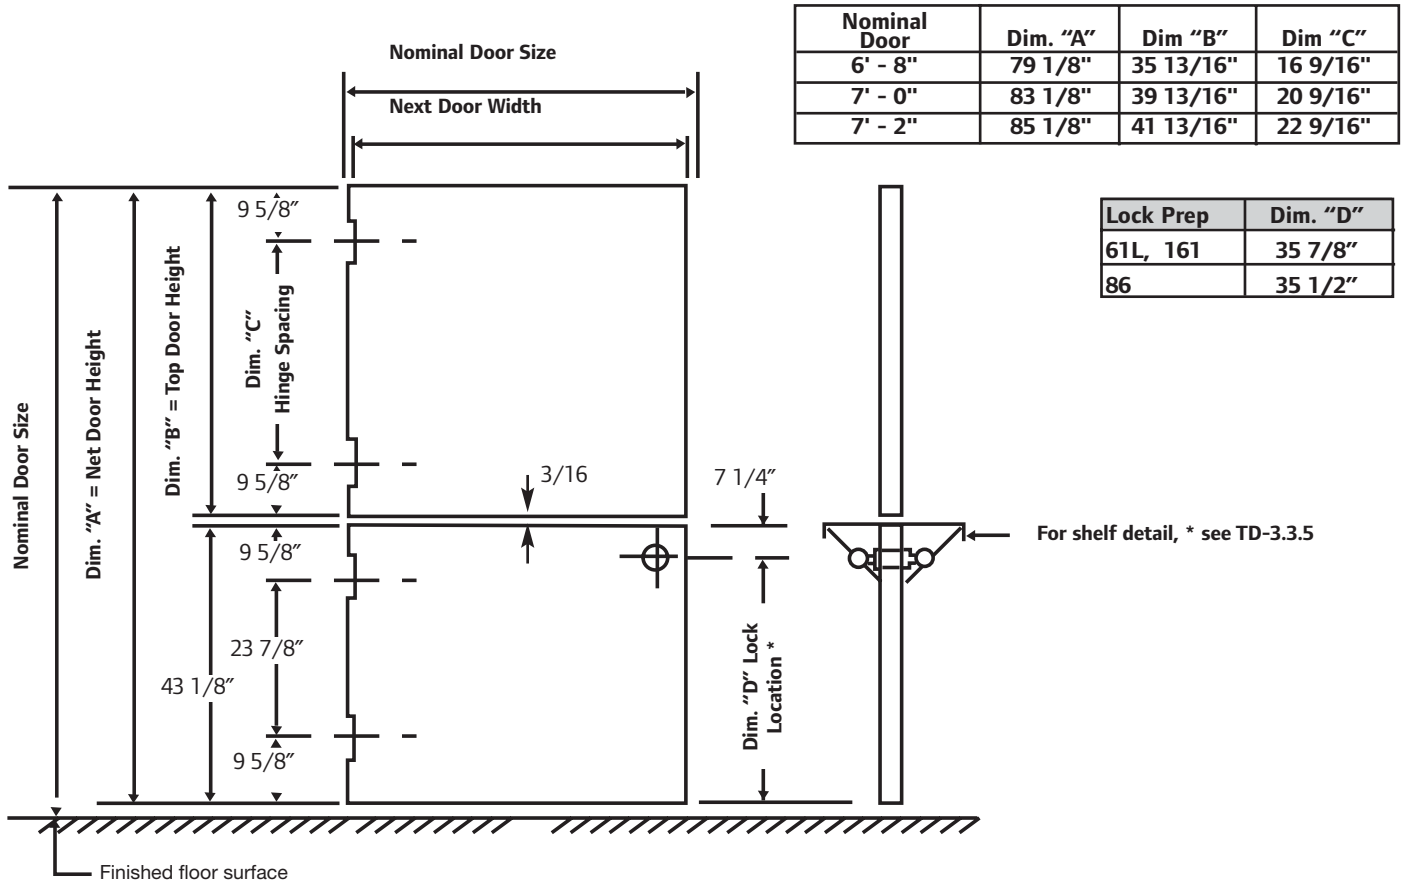

### PURPOSE:

The Dutch door design incorporates two separate door leaves, hung one over the other, and mounted into a single swing opening. Both leaves can operate separately. The bottom leaf latches into the strike jamb of the frame. When specified, the lower leaf can include a dutch door shelf (see TD Sheet #3.3.5)

### APPLICATION:

- Usually installed in storage room applications
- Hardware applications:
  - Bottom leaf - prepared for one (1) Government 161, 61L or Government 86 lock.
- Top leaf locking option:
  - Standard - Surface applied bolt engaging bottom leaf
  - Option - Government 161 lock preparation latching into strike jamb
  - Option - Government 161 lock preparation latching into top of bottom leaf (See TD Sheet # 3.3.8)
- Top door leaf may be equipped with a 14 gage closer reinforcement as an option

### NOTES:

- Sizes available from 2'-0" (610mm) x 6'-8" (2032mm) thru 4'-0" (1219mm) x 7'-2" (2184mm)
  - Single Swing applications only – no double door configurations
- Glass lights are limited to one 100 square inch light in top leaf
- High Frequency Hinge Reinforcements are installed at the top hinge of each door leaf

### PRODUCT AVAILABILITY:

- This product option is available on L and B series doors.