


## APPLIED STOP

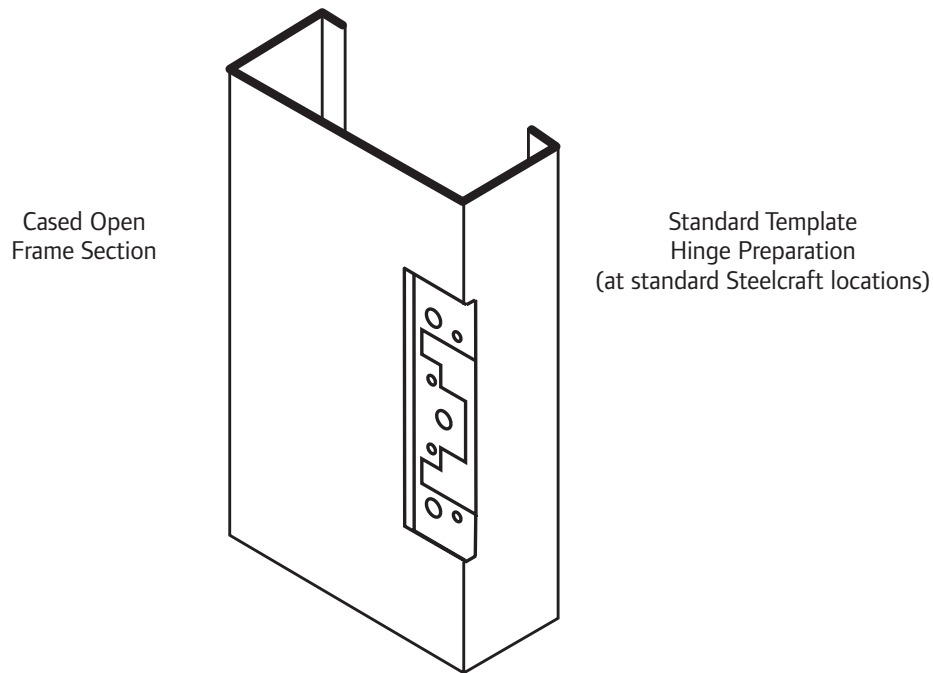

- Application:** Frames with applied stops are used in commercial and/or institutional applications where sound control is a consideration. Frames configured as Cased Open sections can be prepared for standard template hinges at standard Steelcraft vertical locations. Applied Stops, manufactured by others, can be attached to the center portion of the frame either as a hardware item, for safeguarding acoustical control, weatherstripping or for spring adjustable sealing. The field applied stop must provide a 1-9/16" (40mm) rabbet to accommodate a 1-3/8" (35mm) thick door, or a 1-15/16" (49mm) rabbet accommodating a 1-3/4" (45mm) thick door.
- Purpose:** Frames for Applied Stops provide versatility for the building owner to accommodate security, sound attenuation or weather protection using integrated sealing hardware.
- Product Availability:** This frame option is available as non-labeled only for the following Steelcraft Series of Frames:  
 FN16, FN14, F16, F14  
 MU16 and MU 14;  
 DW16, DW14, K16 and K14.