


**VISION LIGHT**

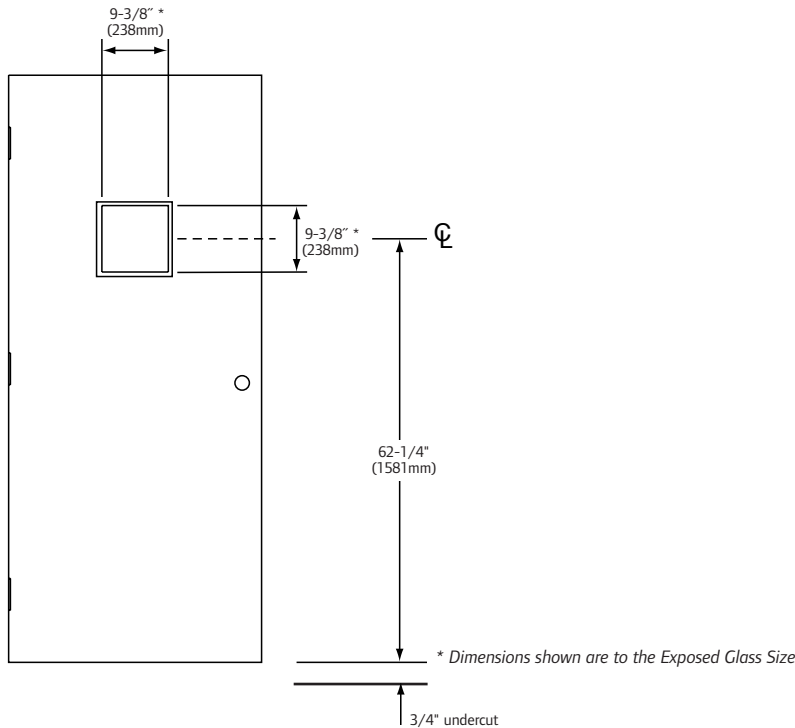

**VISION LIGHT DOOR DESIGN:**

The V Light designation is for a door with a small square window located in the top of the door. The glass size will remain constant regardless of the door size, and the light location is held constant from the bottom of the door.

**GLAZING BEAD SYSTEM:**

1/4" (6mm) thick glass lights are available as standard with the Steelcraft Designer® trim system.

1/2" (13mm) thick insulated glass lights, are available as an option with the Steelcraft Designer trim system for insulated glass.

Insulated glass light thicker than 1/2" (13mm) are available as an option with specially designed overlapping steel trim.

**ORDERING NOMENCLATURE:**

The door ordering nomenclature is suffixed with the letter **V**.

**DOOR SERIES AVAILABLE:**


Vision Light kits are available for the following door series in all of their standard options and gages: L, B, and T-Series.

**GLASS LIGHT SIZES:**

The following critical dimensions apply to the standard Steelcraft V Light (vision light) window designs:

- Exposed Glass Size = 9 3/8" (238mm) square
- Glass Cutting Size = 10 5/8" (270mm) square
- Door Cutout Size = 11" (279mm) square

**GLAZING DETAILS:**

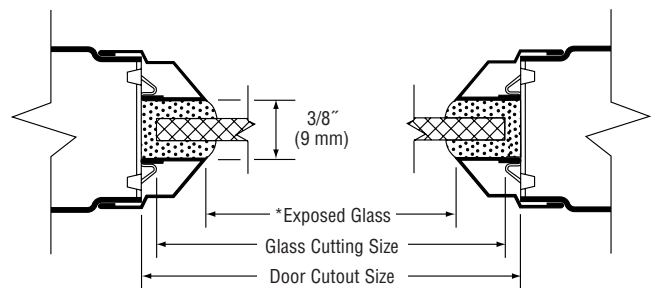

**Note:** For fire rated applications using ceramic type glazing, consult the glass manufacturer's glazing instructions for glass, caulking and/or glazing tape requirements. Details will vary as required by glazing selections.

Details are subject to change without prior notice.

© 2000 Steelcraft Co.