



**VON DUPRIN® INPACT™ GLASS LIGHTS** (Mortise and Concealed Vertical Rod)

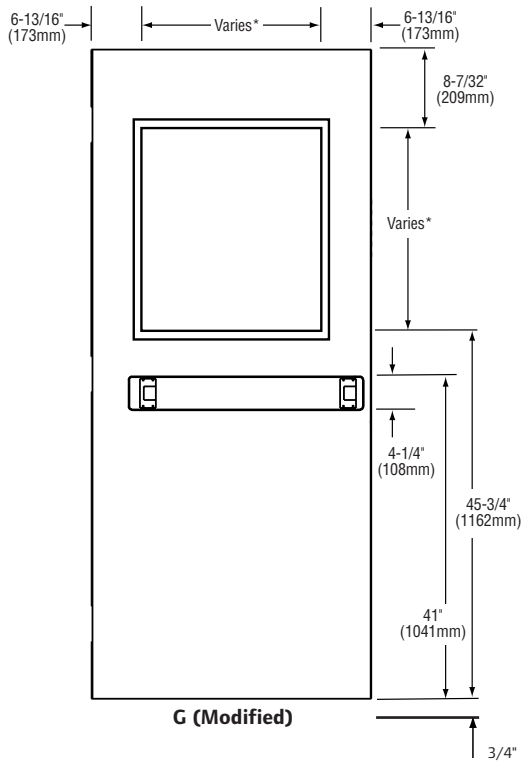

**OPTIONAL DETAILS:**

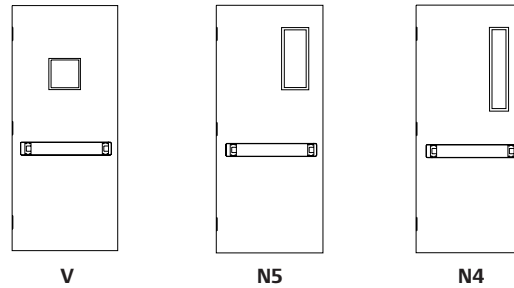

\*Dimensions are shown to the Exposed Glass

**GLASS LIGHTS:**

Glass light cutouts are available in N4, N5 and V-Light designs without modification. Other lights are available but have limited height due to the exit device preparation.

**GLAZING BEAD SYSTEM:**

1/4" (6mm) thick glass lights are available as standard with the Steelcraft Designer® Series trim system.

1/2" (13mm) thick insulated glass lights, are available as an option with the Steelcraft Designer Series trim system for insulated glass.

Insulated glass lights thicker than 1/2" (13mm) are available as an option with specially designed overlapping steel trim.

**GLASS LIGHT SIZES:**

The following dimensions outline the maximum glass heights available with the InPact door preparation:

Door Heights* (Nominal)	6'8"	7'0"	7'2"	8'0"
Maximum Exposed Glass Height	25 1/8"	29 1/8"	31 1/8"	41 1/8"

\*To determine maximum glass light height for other sized doors, for exposed glass, subtract 54" (1372mm) from net door size.


The following critical dimension applies to the standard Steelcraft light designs with InPact preparation:

- Glass Cutting Size** = exposed glass size + 1 1/8"
- Door Cutout Size** = exposed glass size + 1 1/2"

Details are subject to change without prior notice.

© 2000 Steelcraft Co.

**GLAZING DETAILS:**

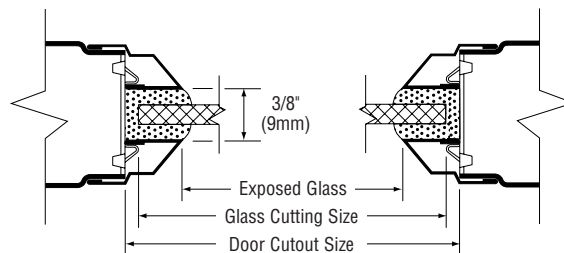

**Note:** For fire rated applications using ceramic type glazing, consult the glass manufacturer's glazing instructions for glass, caulking and/or glazing tape requirements. Details will vary as required by glazing selections.

**NOTES:**

1. Consult code for ADA requirements on glass cutouts.
2. Refer to **8.4.9 & 8.4.10** (Hardware section) for specific Inpact device preparation requirements.