


PARTS LIST				
SL. NO.	QTY.	DESCRIPTION	MODEL	BRAND
1	2	FULL MORTISE PIN & BARREL CONTINUOUS	700	IVES
2	2	INSET MOTISE EXIT (PUSH SIDE) X LEVER TRIM (PULL SIDE)	94/9575 (MORTISE) x 940 L-BE	VON DUPRIN
3	2	SURFACE MOUNTED PA CLOSER	4040XP	LCN
4	2	MAGNETIC DOOR HOLDER	SEM 7850	LCN
5	2	DOORS (ADD ADA LIGHT IN CROSS CORRIDOR HEALTHCARE APPLICATIONS)	L18 HC CORE	STEELCRAFT
6	1	FRAME	F16 SINGLE RABBET	STEELCRAFT
7	2	PERIMETER & MEETING EDGE GASKETING (N/A FROM STL)	488/188 & 328	ZERO, OTHERS

NOTES:

1. MAX 8'0" (96") NOMINAL OPENING WIDTH (SHOWN). DOORS ARE DOWNSIZED FOR TYP 3/32" GAPS AT BEVELED DOOR EDGES, AND FOR HINGES.
2. FORMULA FOR CLEAR OPENING: (REF LEFT DOOR. REF SIMILAR DIMS ON RIGHT DOOR)  
FORMULA FOR CLEAR OPENING: FOR ANY NOMINAL OPENING WIDTH "N", THE U.S. ADA CLEAR OPENING WIDTH IS  $45-13/16 - (96 - N) / 2$ , AND THE CBC OPENING WIDTH IS  $44-3/16 - (96 - N) / 2$ .  
CA CBC EXAMPLE: IF A = 6'0", or 72", THEN  $44-3/16 - (96 - 72) / 2 = 32-3/16$  CLEAR OPENING WIDTH.
3. ORDER P3-180 FOR 4040XP CLOSER WITH 180 DEGREE STD Rw/PA TEMPLATE.
4. DIMENSIONAL AND CALCULATED VALUES MAY VARY DEPENDING ON ALLOWABLE MANUFACTURING TOLERANCES AS WELL AS DIFFERENCES IN YOUR OPENING SUCH AS WALL THICKNESS, FRAME AND ANCHOR TYPE.  
- SUBSTITUTE HARDWARE MAY BE USED IF AVAILABLE WITH THIS SYSTEM; CHANGES MAY AFFECT WALLS, DOOR DOWNSIZING AND CLEAR OPENING.

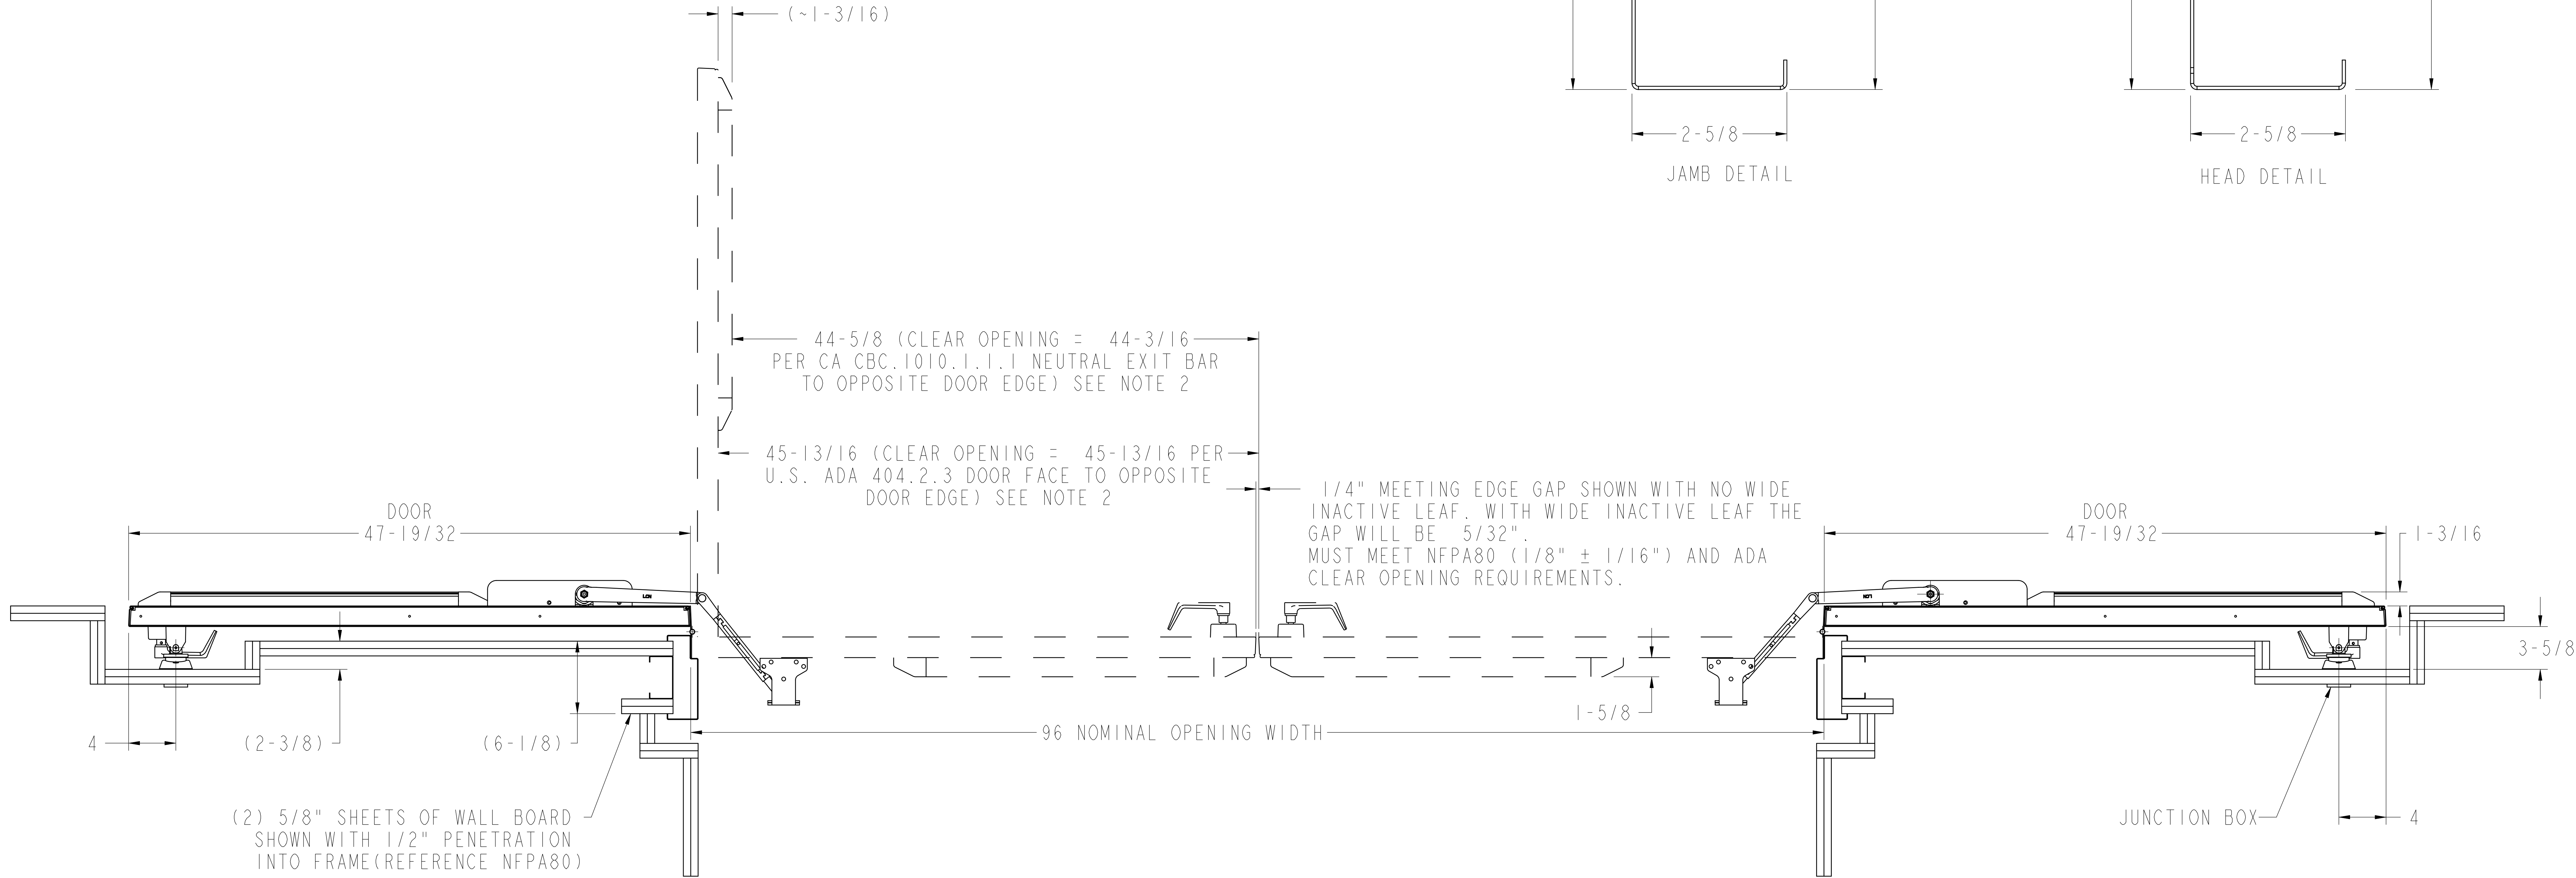

ALLEGION

INTEGRATED DOOR SYSTEM

IMPACT SET P3


(700 Hinge)

Pair Application (same swing)

COPYRIGHT © 2022 SCHLAGE LOCK CO LLC

ALL RIGHTS RESERVED

v.4/4/2022

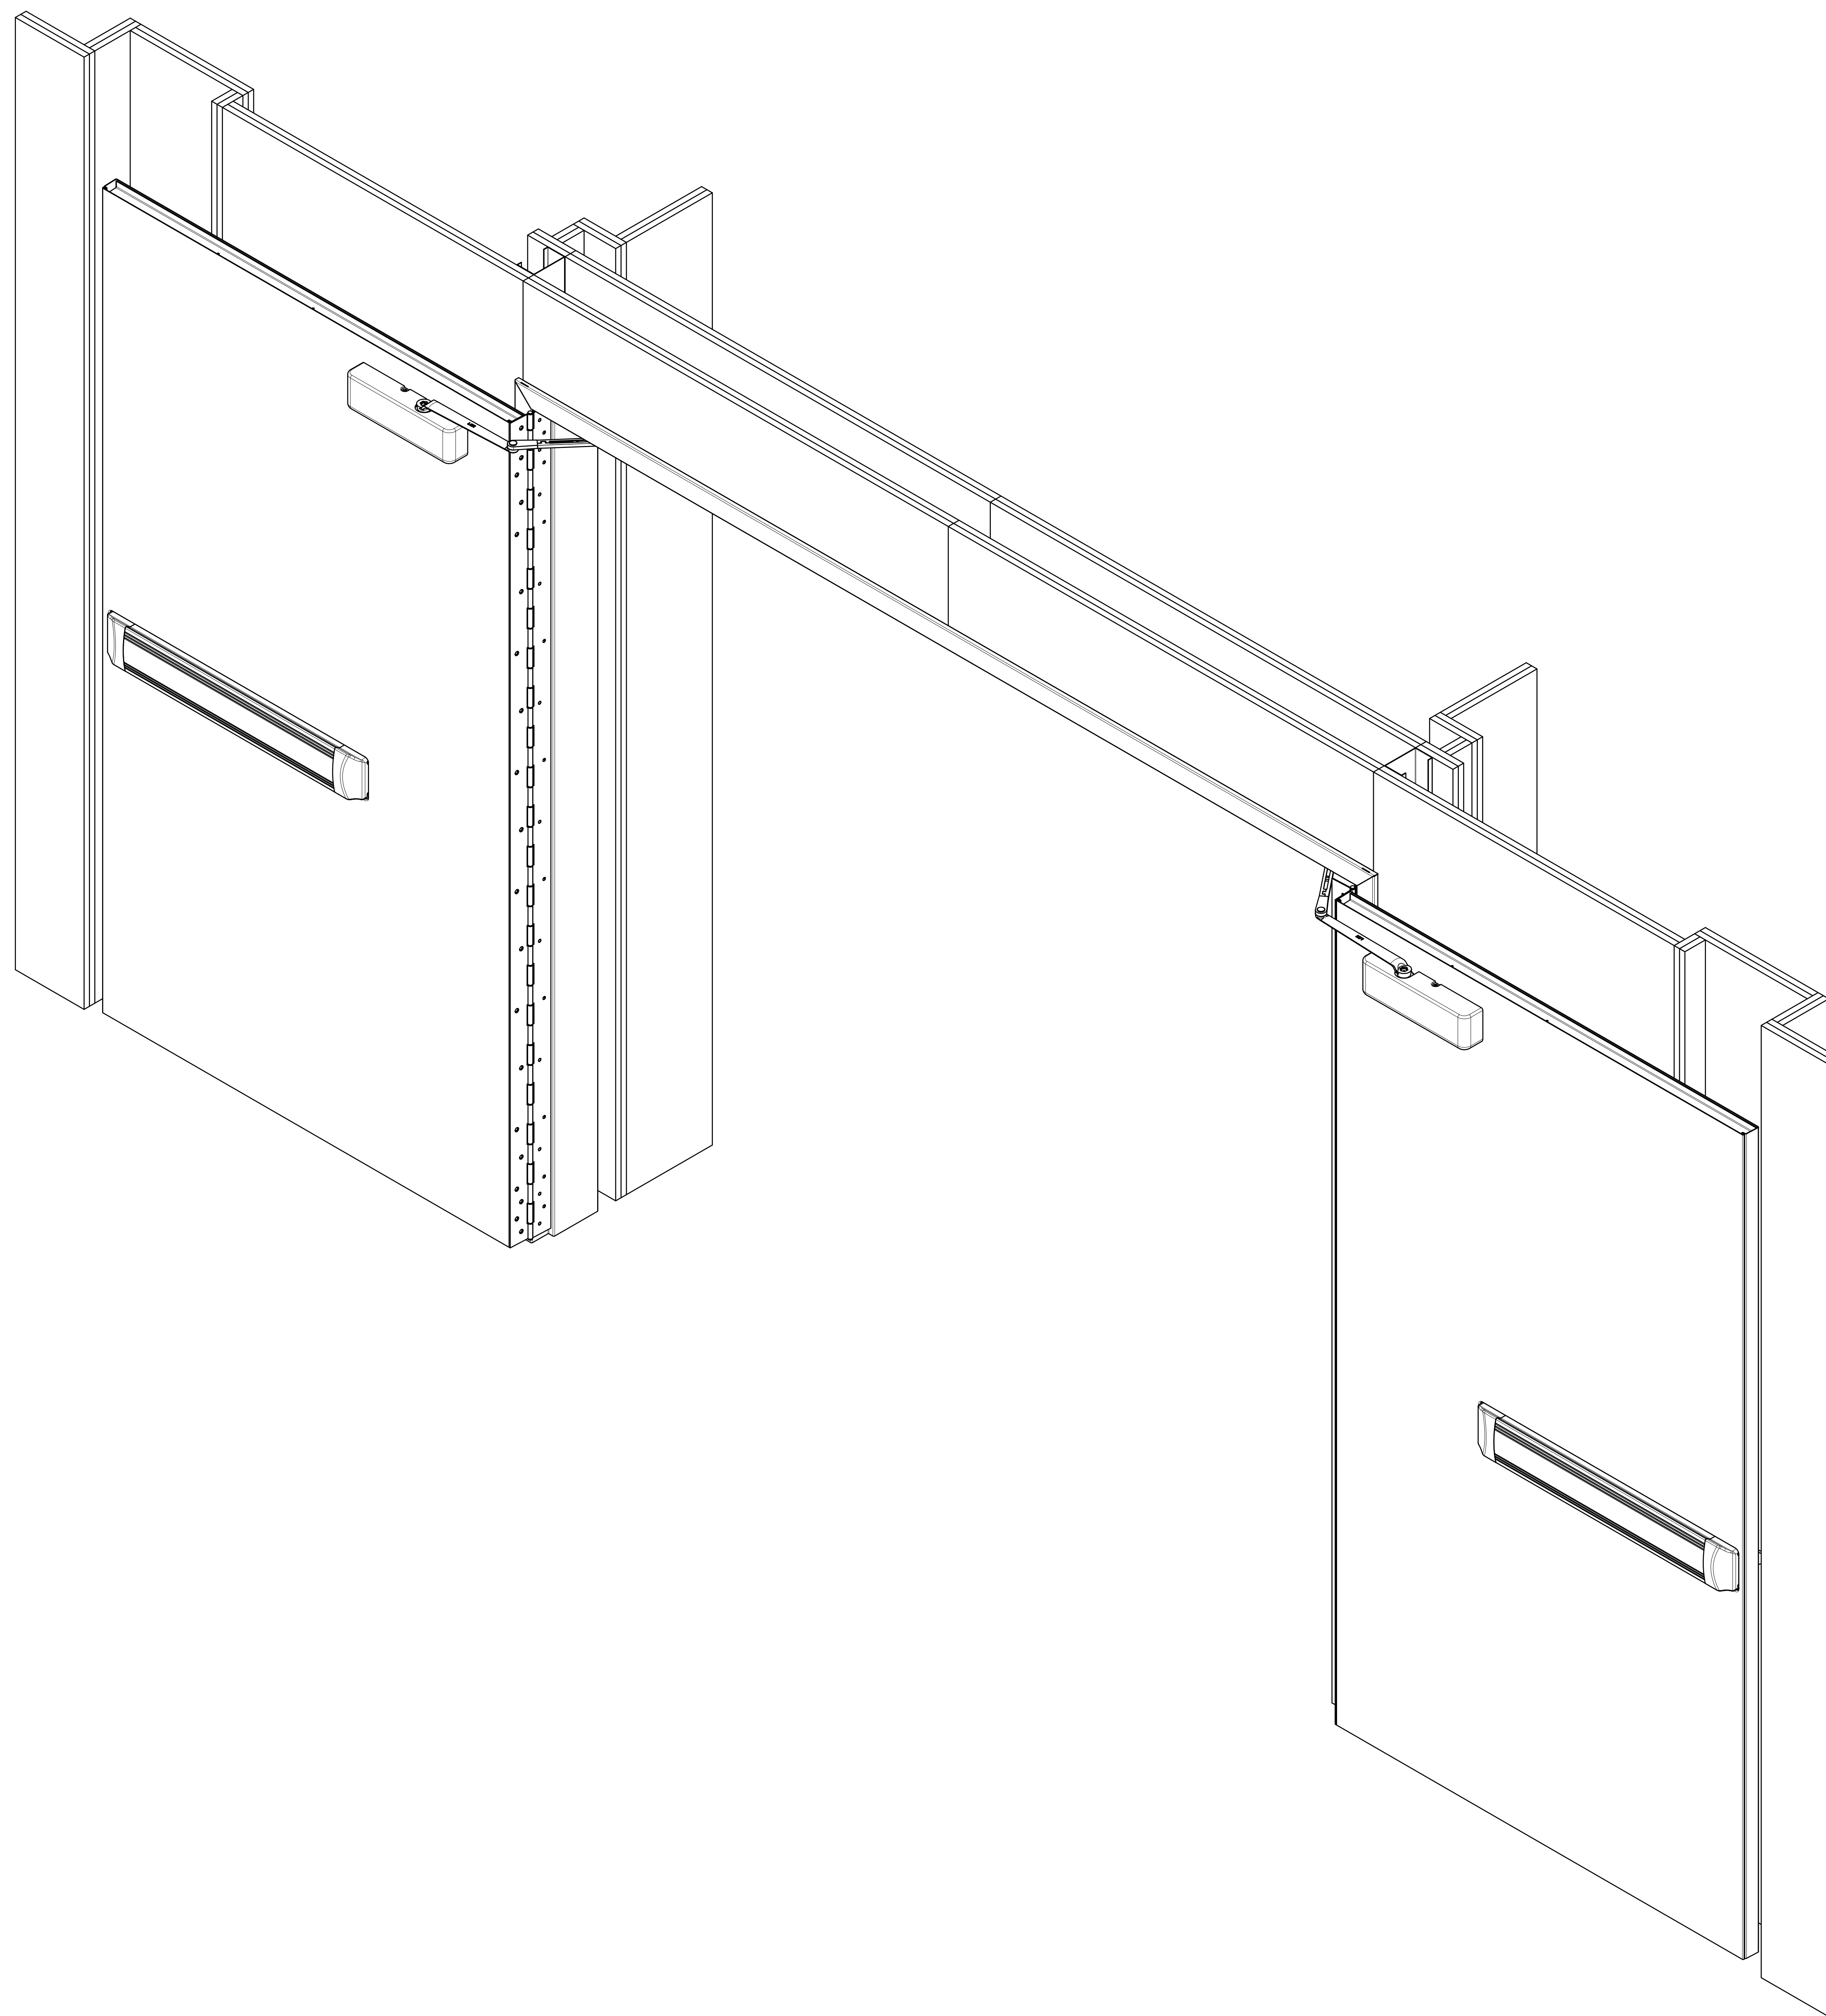

ALLEGION	INTEGRATED DOOR SYSTEM	
	<b>IMPACT SET P3</b>	(700 Hinge)
	<b>Pair Application (same swing)</b>	
	COPYRIGHT © 2022 SCHLAGE LOCK CO LLC ALL RIGHTS RESERVED	
		v.4/4/2022



INPACT SYSTEM SET P3 (700 Stainless pin & barrel continuous hinge)





INPACT SYSTEM SET P3 (700 Stainless pin & barrel continuous hinge)



INPACT SYSTEM SET P3 (700 Stainless pin & barrel continuous hinge)