
PARTS LIST				
SL. NO.	QTY.	DESCRIPTION	MODEL	BRAND
		FULL MORTISE PIN & BARREL CONTINUOUS	700	IVES
2		INSET MORTISE EXIT (PUSH SIDE) X LEVER TRIM (PULL SIDE)	94/9575 (MORTISE) x 940 L-BE	VON DUPRIN
3		WALL MOUNTED TRACK ARM CLOSER	4000T	LCN
4		MAGNETIC DOOR HOLDER	SEM 7850	LCN
5		DOOR	LI8 HC CORE	STEELCRAFT
6		FRAME	F16 SINGLE RABBET	STEELCRAFT
7		PERIMETER	488/188	ZERO, OTHERS

NOTES:


I. MAX 4'0" (48") NOMINAL OPENING WIDTH (SHOWN). DOORS ARE DOWNSIZED FOR TYP 3/32" GAPS AT BEVELED DOOR EDGES, AND FOR HINGES.


- 2. FORMULA FOR CLEAR OPENING: FOR ANY NOMINAL OPENING WIDTH "N", THE U.S. ADA CLEAR OPENING WIDTH IS 45-1/16 (48 N), AND THE CBC OPENING WIDTH IS 43-7/16 (48 N). CA CBC EXAMPLE: IF A = 3'0", or 36", THEN 43-7/16 (48 36) = 31-7/16 CLEAR OPENING WIDTH.
- 3. ORDER CLOSERS USING ONE OF THE FOLLOWING OPTIONS:
- SI-90-3T FOR 4003T (34"-42" WIDTH) STD TEMPLATE.
- SI-90-4T FOR 4004T (>42"-48" WIDTH) STD TEMPLATE.
- SI-90-ADA FOR 4003T X ST-2967. ST-2967 SHIPS STD 4040XP CYLINDER; SPRING SETTING MUST BE FIELD ADJUSTED TO CLOSE THE DOOR. - MAY SUBSTITUTE (REF NOTE 5) 4000T WALL MOUNTED CLOSER WITH 4040XP DOOR MOUNTED CLOSER AND STD Rw/PA TEMPLATE.
- 4. MIN 12 GAUGE STEEL BACKER (BY OTHERS) FOR MOUNTING CLOSER TO WALL. EXTEND BACKER PAST SIZE OF CLOSER TO SUPPORT MINOR VARIANCES IN CLOSER LOCATION AND DISTANCE TO MOUNTING SCREWS.
- 5. DIMENSIONAL AND CALCULATED VALUES MAY VARY DEPENDING ON ALLOWABLE MANUFACTURING TOLERANCES AS WELL AS DIFFERENCES IN YOUR OPENING SUCH AS WALL THICKNESS, FRAME AND ANCHOR TYPE.
- SUBSTITUTE HARDWARE MAY BE USED IF AVAILABLE WITH THIS SYSTEM; CHANGES MAY AFFECT WALLS, DOOR DOWNSIZING AND CLEAR OPENING.

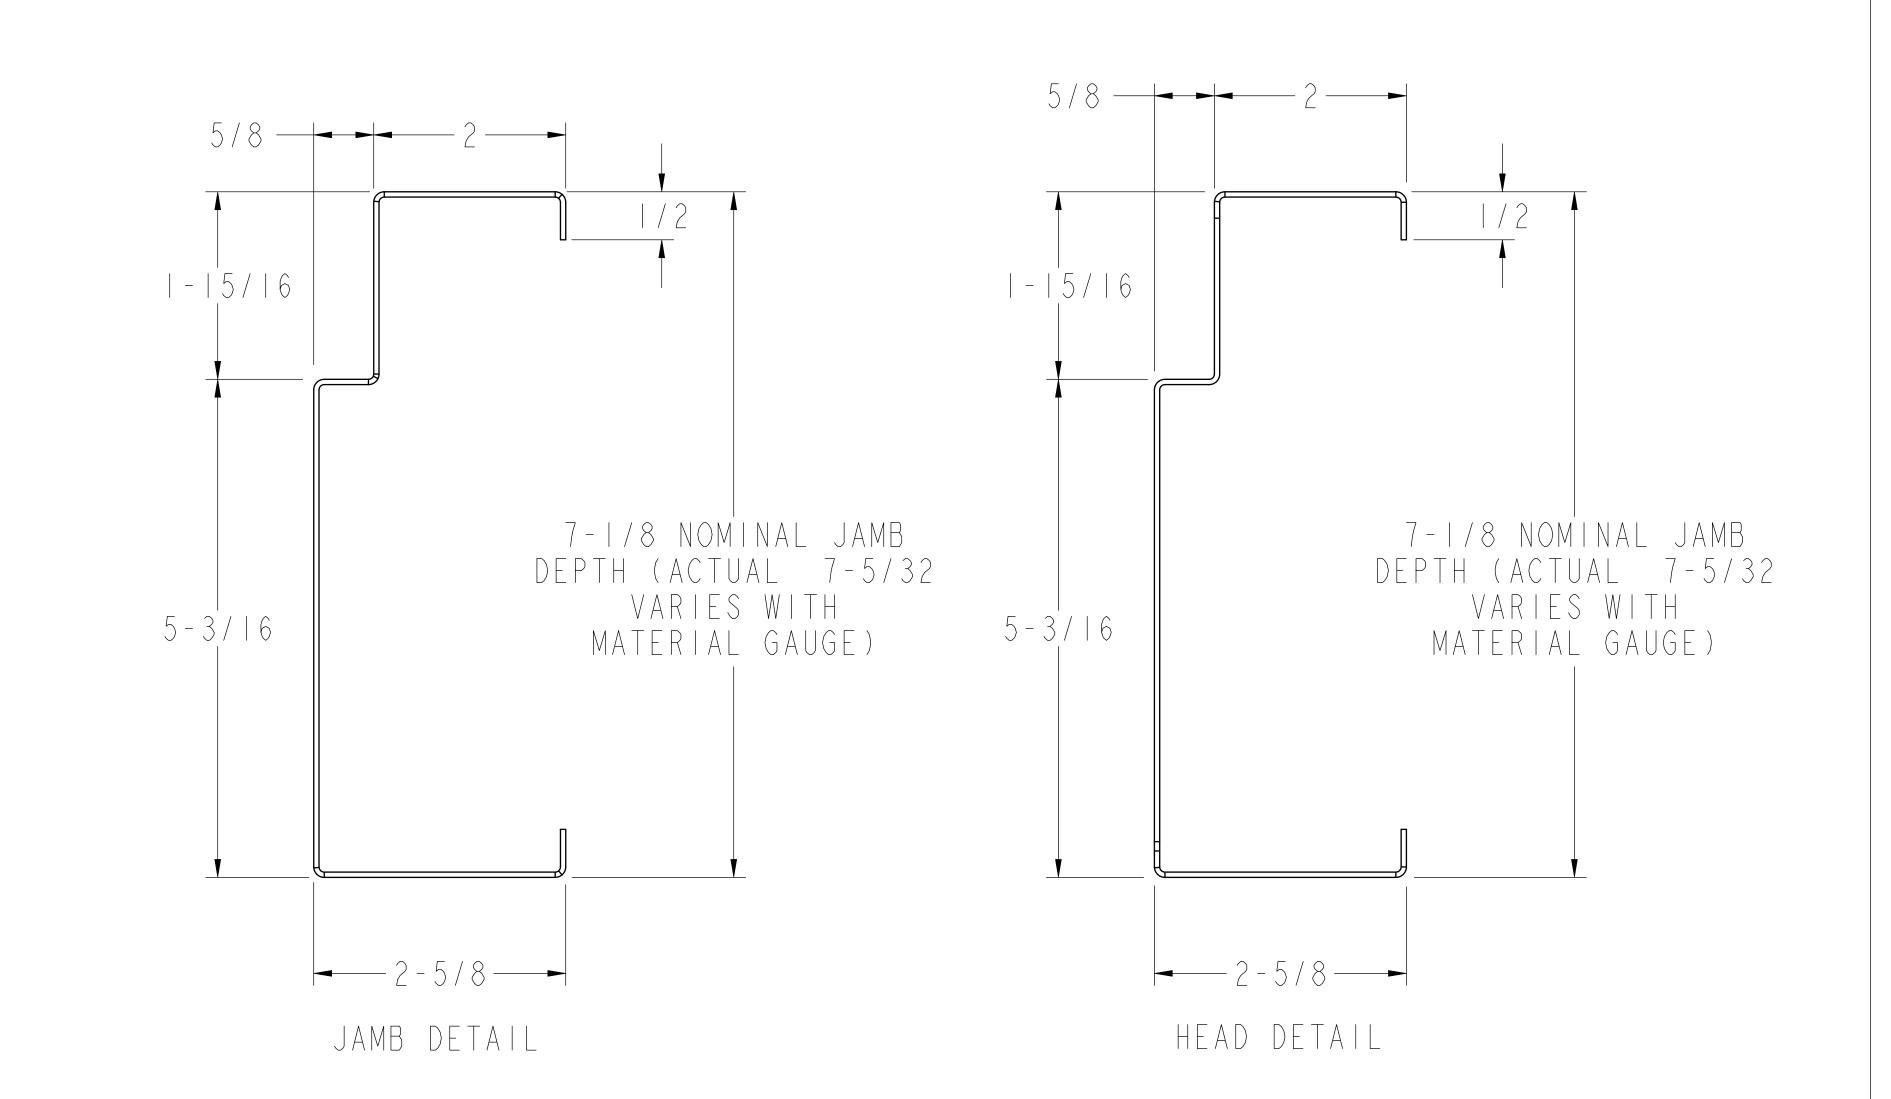

(700 Hinge)

v.4/4/2022

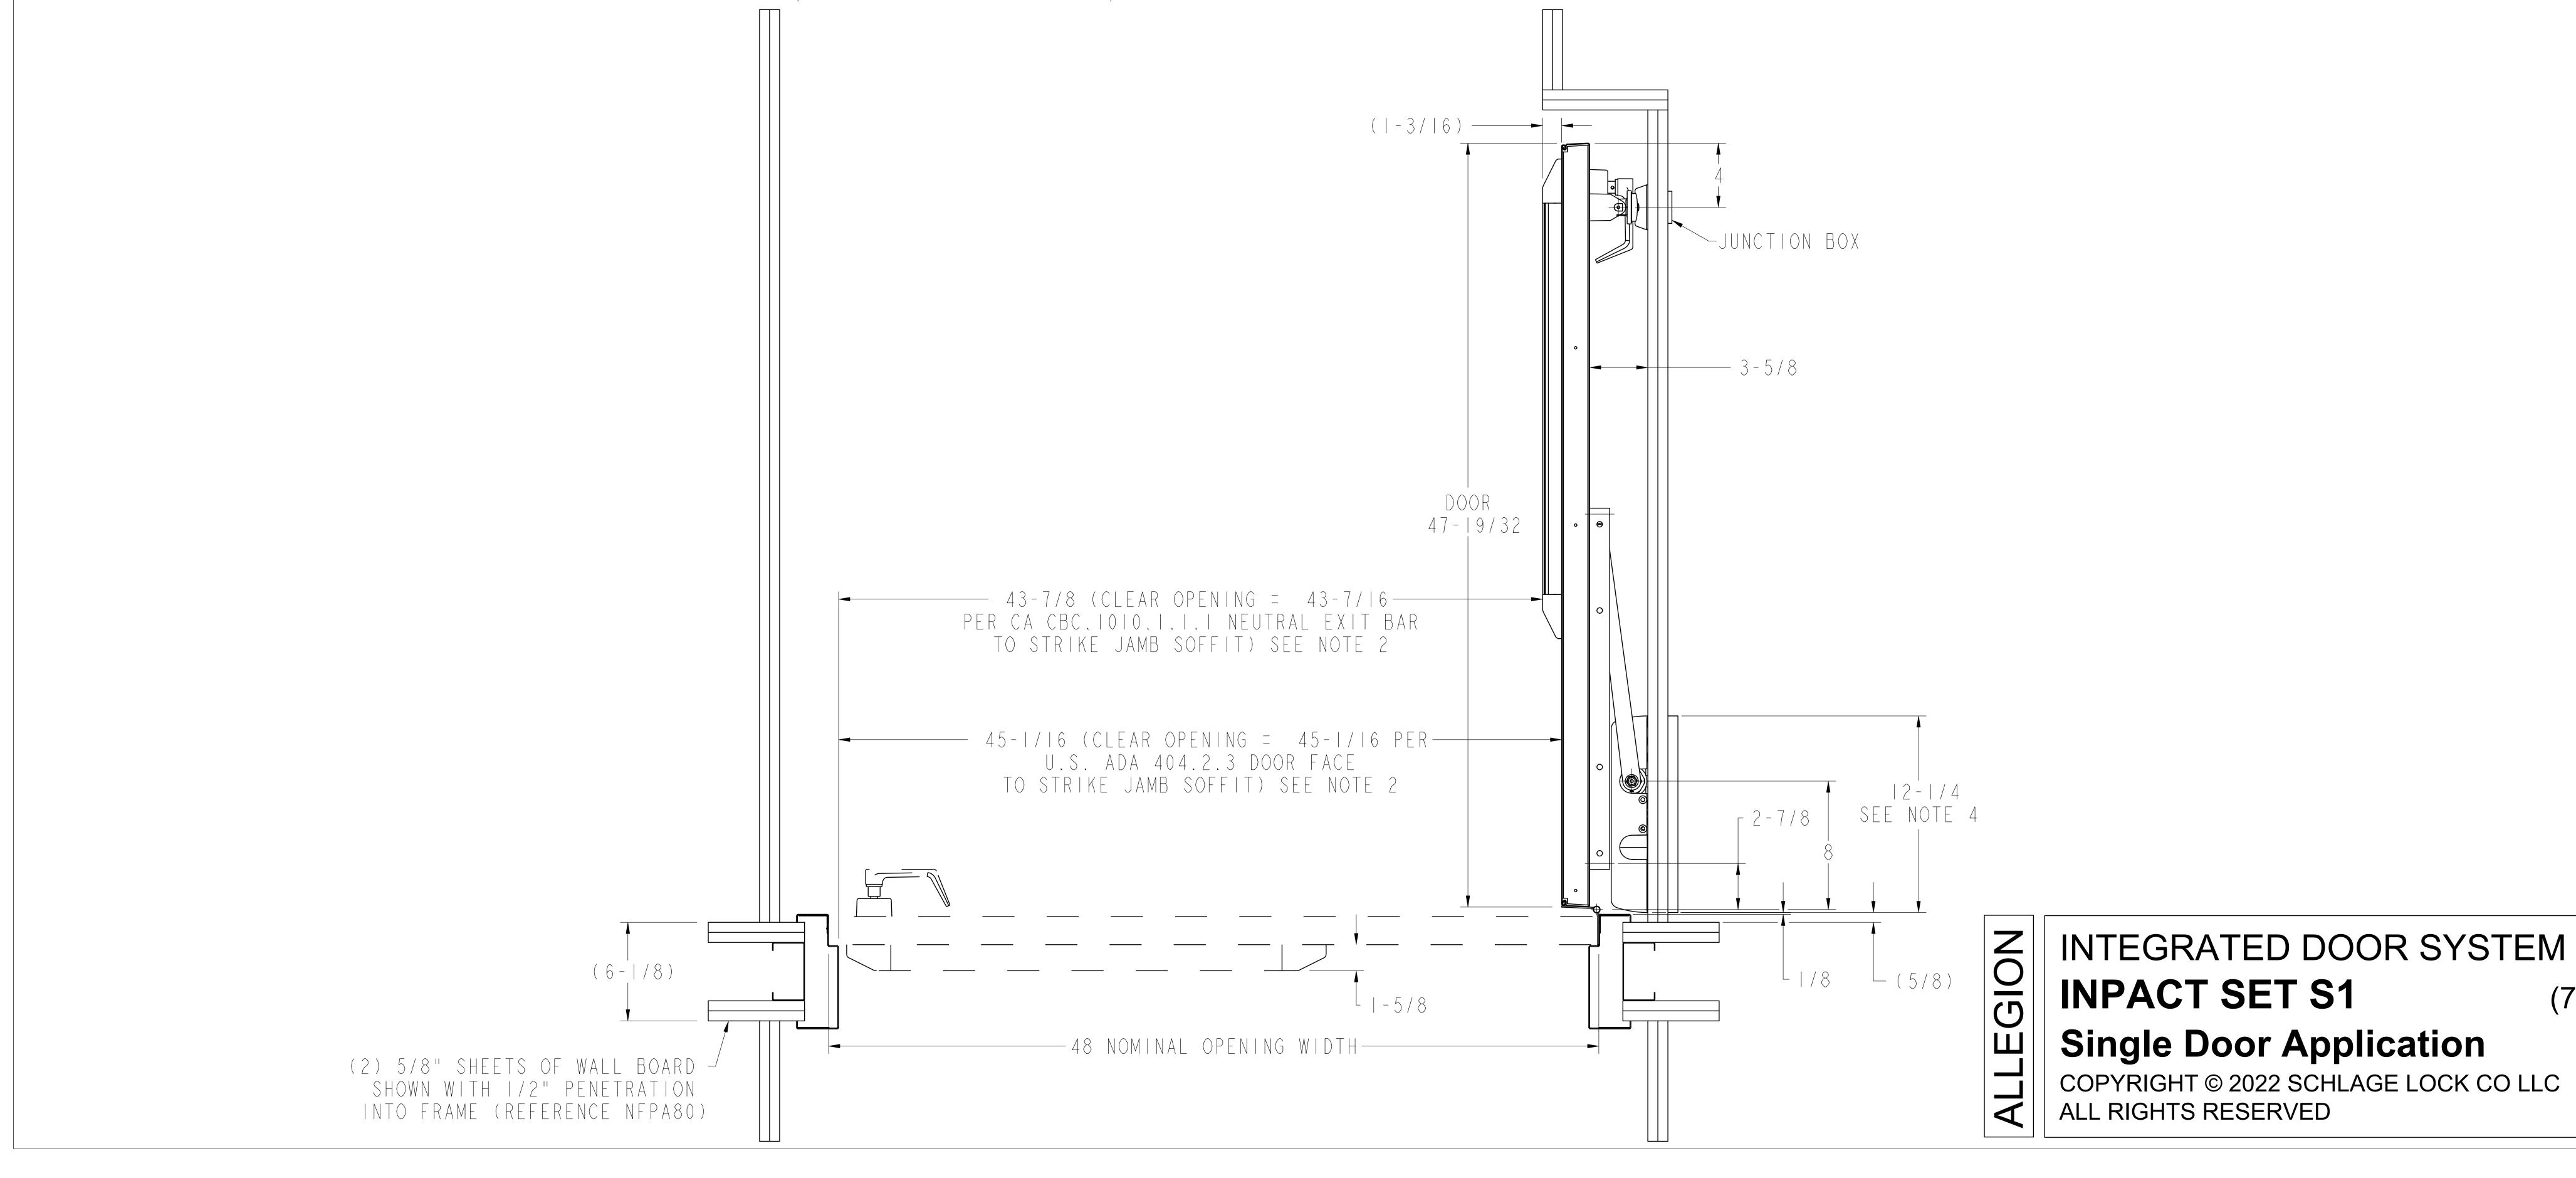

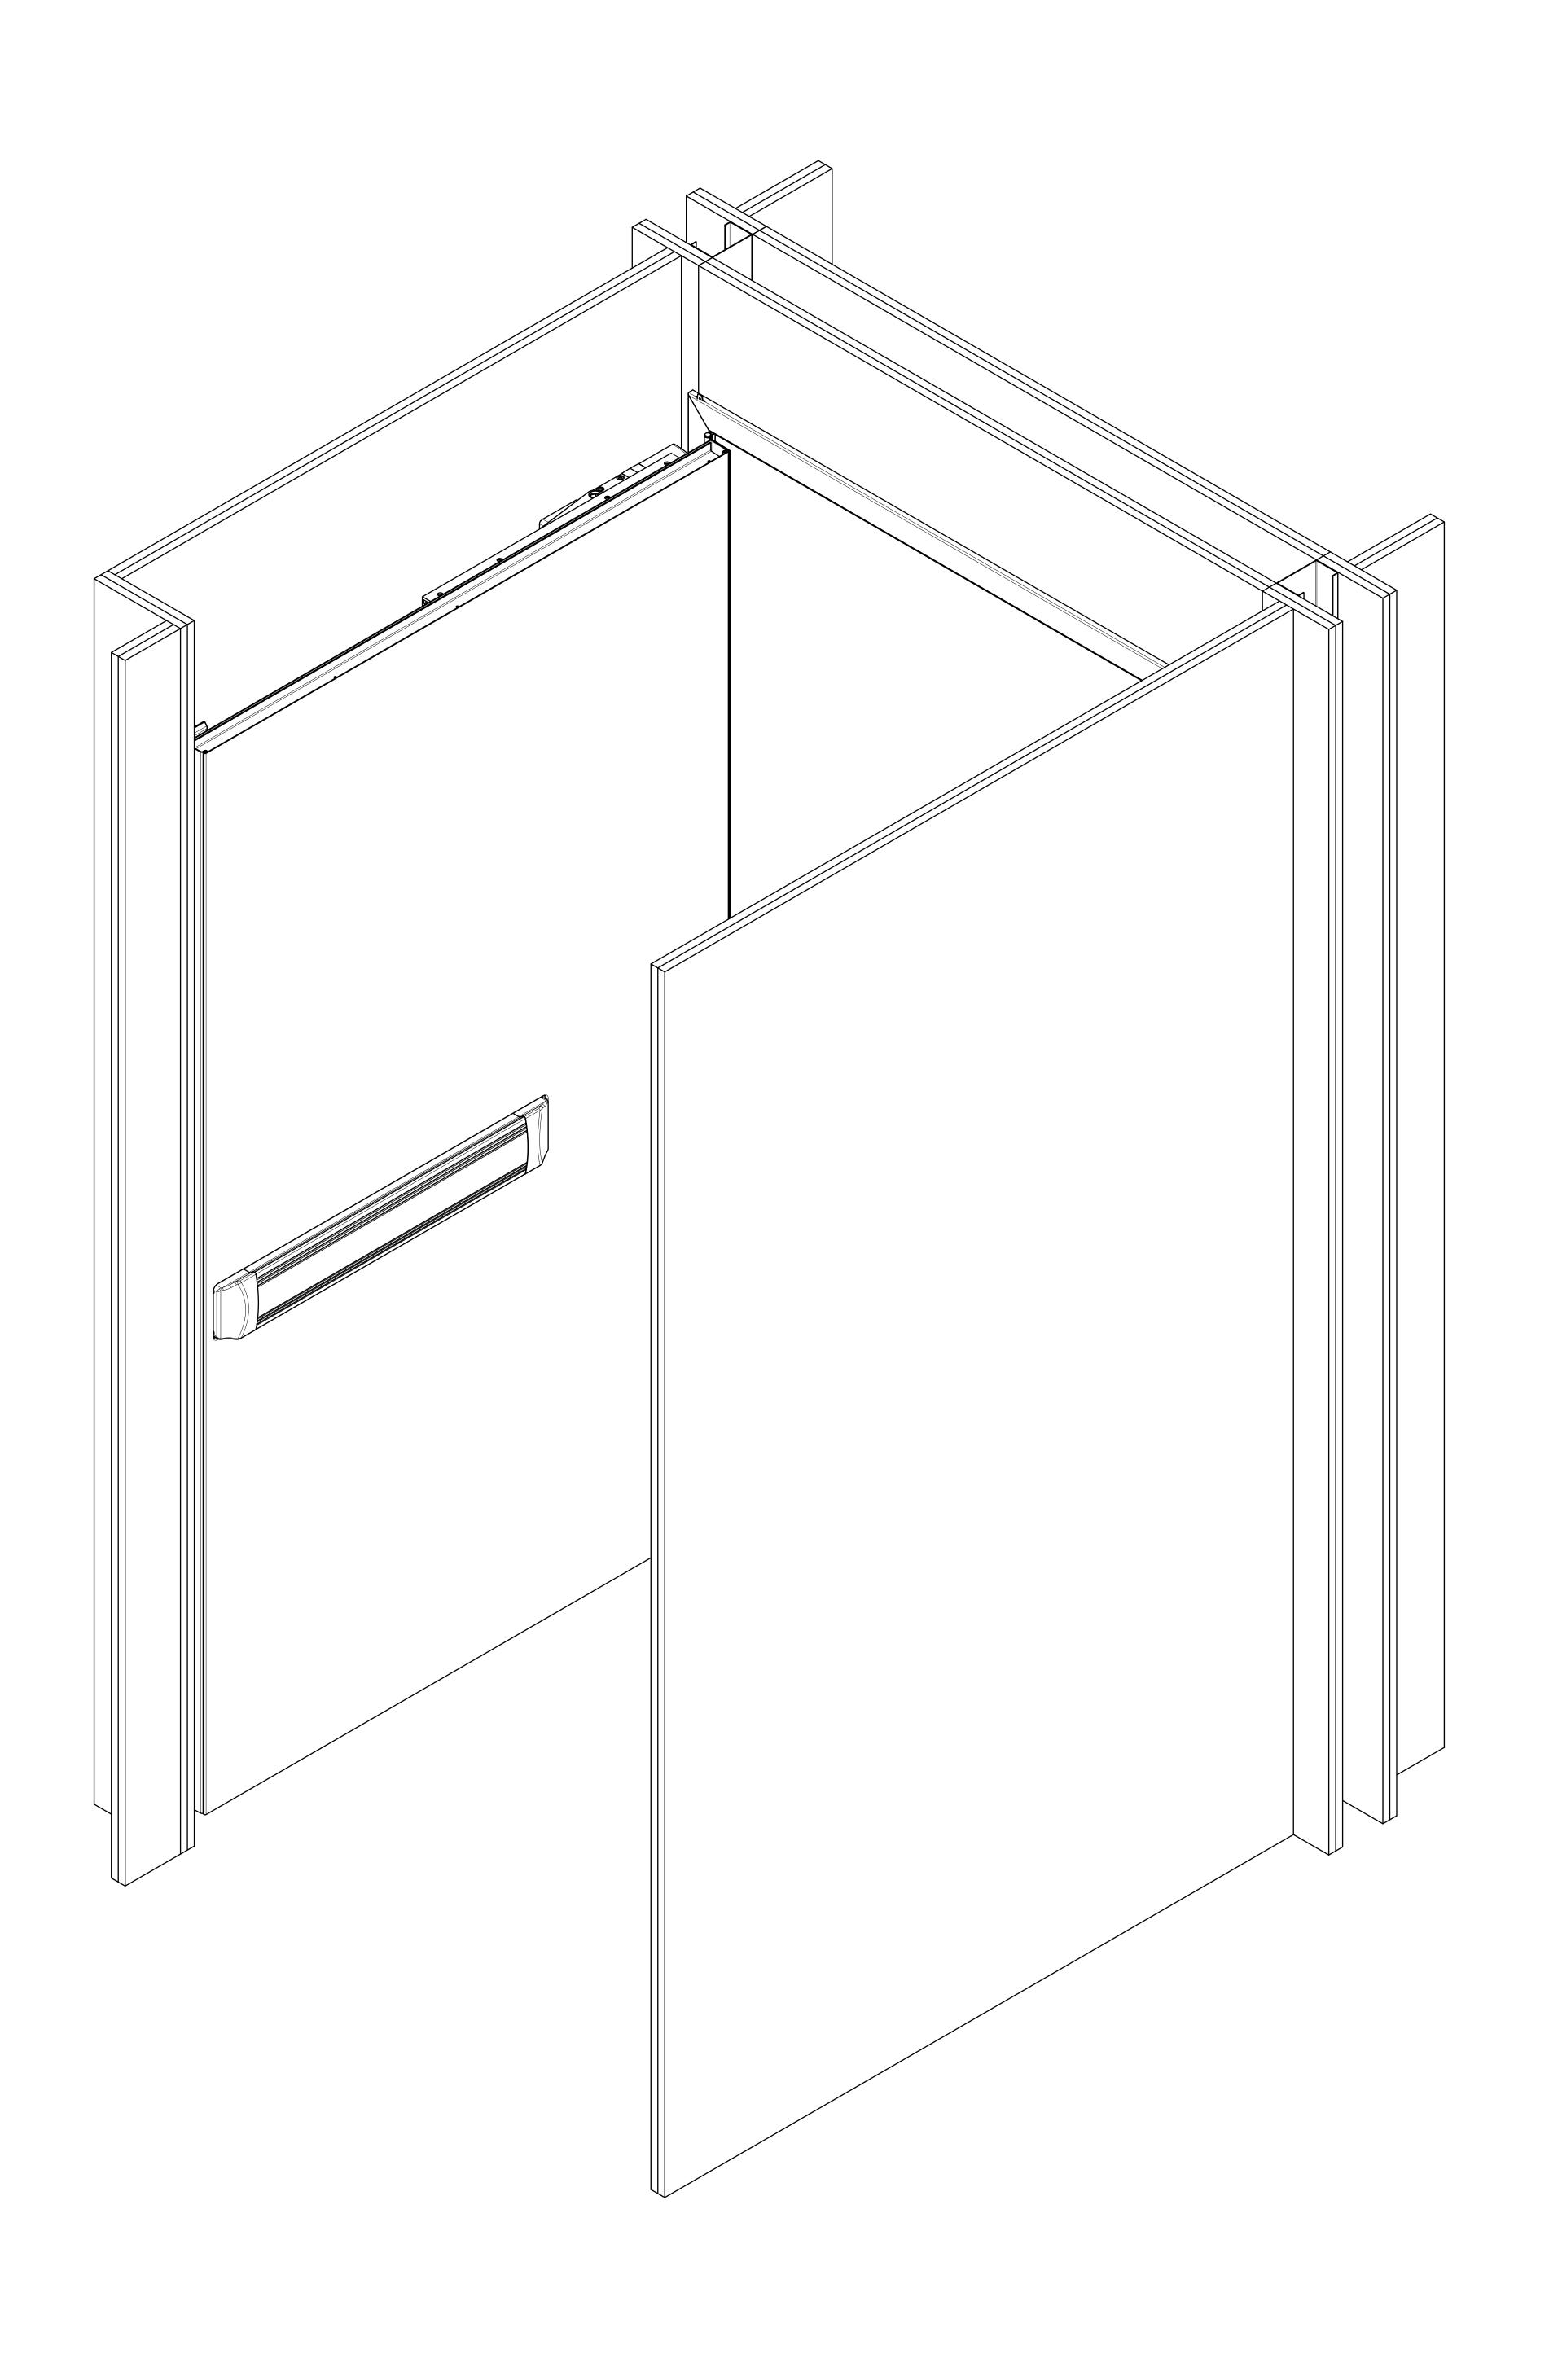

INTEGRATED DOOR SYSTEM

(700 Hinge)

INPACT SET S1

Single Door Application
COPYRIGHT © 2022 SCHLAGE LOCK CO LLC
ALL RIGHTS RESERVED

v.4/4/2022



