
PARTS LIST			
SL. NO.	QTY. DESCRIPTION	MODEL	BRAND
	BEVELED SWING CLEAR PIN & BARREL CONTINUOUS	7 I I B S C	IVES
2	I NSET MOTISE EXIT (PUSH SIDE) X LEVER TRIM (PULL SIDE)	94/9575 (MORTISE) x 940 L-BE	VON DUPRIN
3	I SURFACE MOUNTED PA CLOSER	4040XP	LCN
4	I MAGNETIC DOOR HOLDER	SEM 7850	LCN
5	I DOORS	LI8 HC CORE	STEELCRAFT
6	I FRAME	FI6 SINGLE RABBET	STEELCRAFT
7	PERIMETER & MEETING EDGE GASKETING (N/A FROM STL)	188/328	ZERO, OTHERS

NOTES:

- I. MAX 4'0" (48") NOMINAL OPENING WIDTH (SHOWN). DOORS ARE DOWNSIZED FOR TYP 3/32" GAPS AT BEVELED DOOR EDGES, AND FOR HINGES.
- 2. FORMULA FOR CLEAR OPENING: FOR ANY NOMINAL OPENING WIDTH "N", THE U.S. ADA CLEAR OPENING WIDTH IS 46-9/16 (48 N), AND THE CBC OPENING WIDTH IS 44-15/16 (48 N). CA CBC EXAMPLE: IF A = 3'0", or 36", THEN 44-15/16 - (48 - 36) = 32-15/16 CLEAR OPENING WIDTH.
- 3. ORDER S4-180 FOR 4040XP CLOSER WITH 180 DEGREE STD Rw/PA TEMPLATE.
- 4. DIMENSIONAL AND CALCULATED VALUES MAY VARY DEPENDING ON ALLOWABLE MANUFACTURING TOLERANCES AS WELL AS DIFFERENCES IN YOUR OPENING SUCH AS WALL THICKNESS, FRAME AND ANCHOR TYPE. - SUBSTITUTE HARDWARE MAY BE USED IF AVAILABLE WITH THIS SYSTEM; CHANGES MAY AFFECT WALLS, DOOR DOWNSIZING AND CLEAR OPENING.

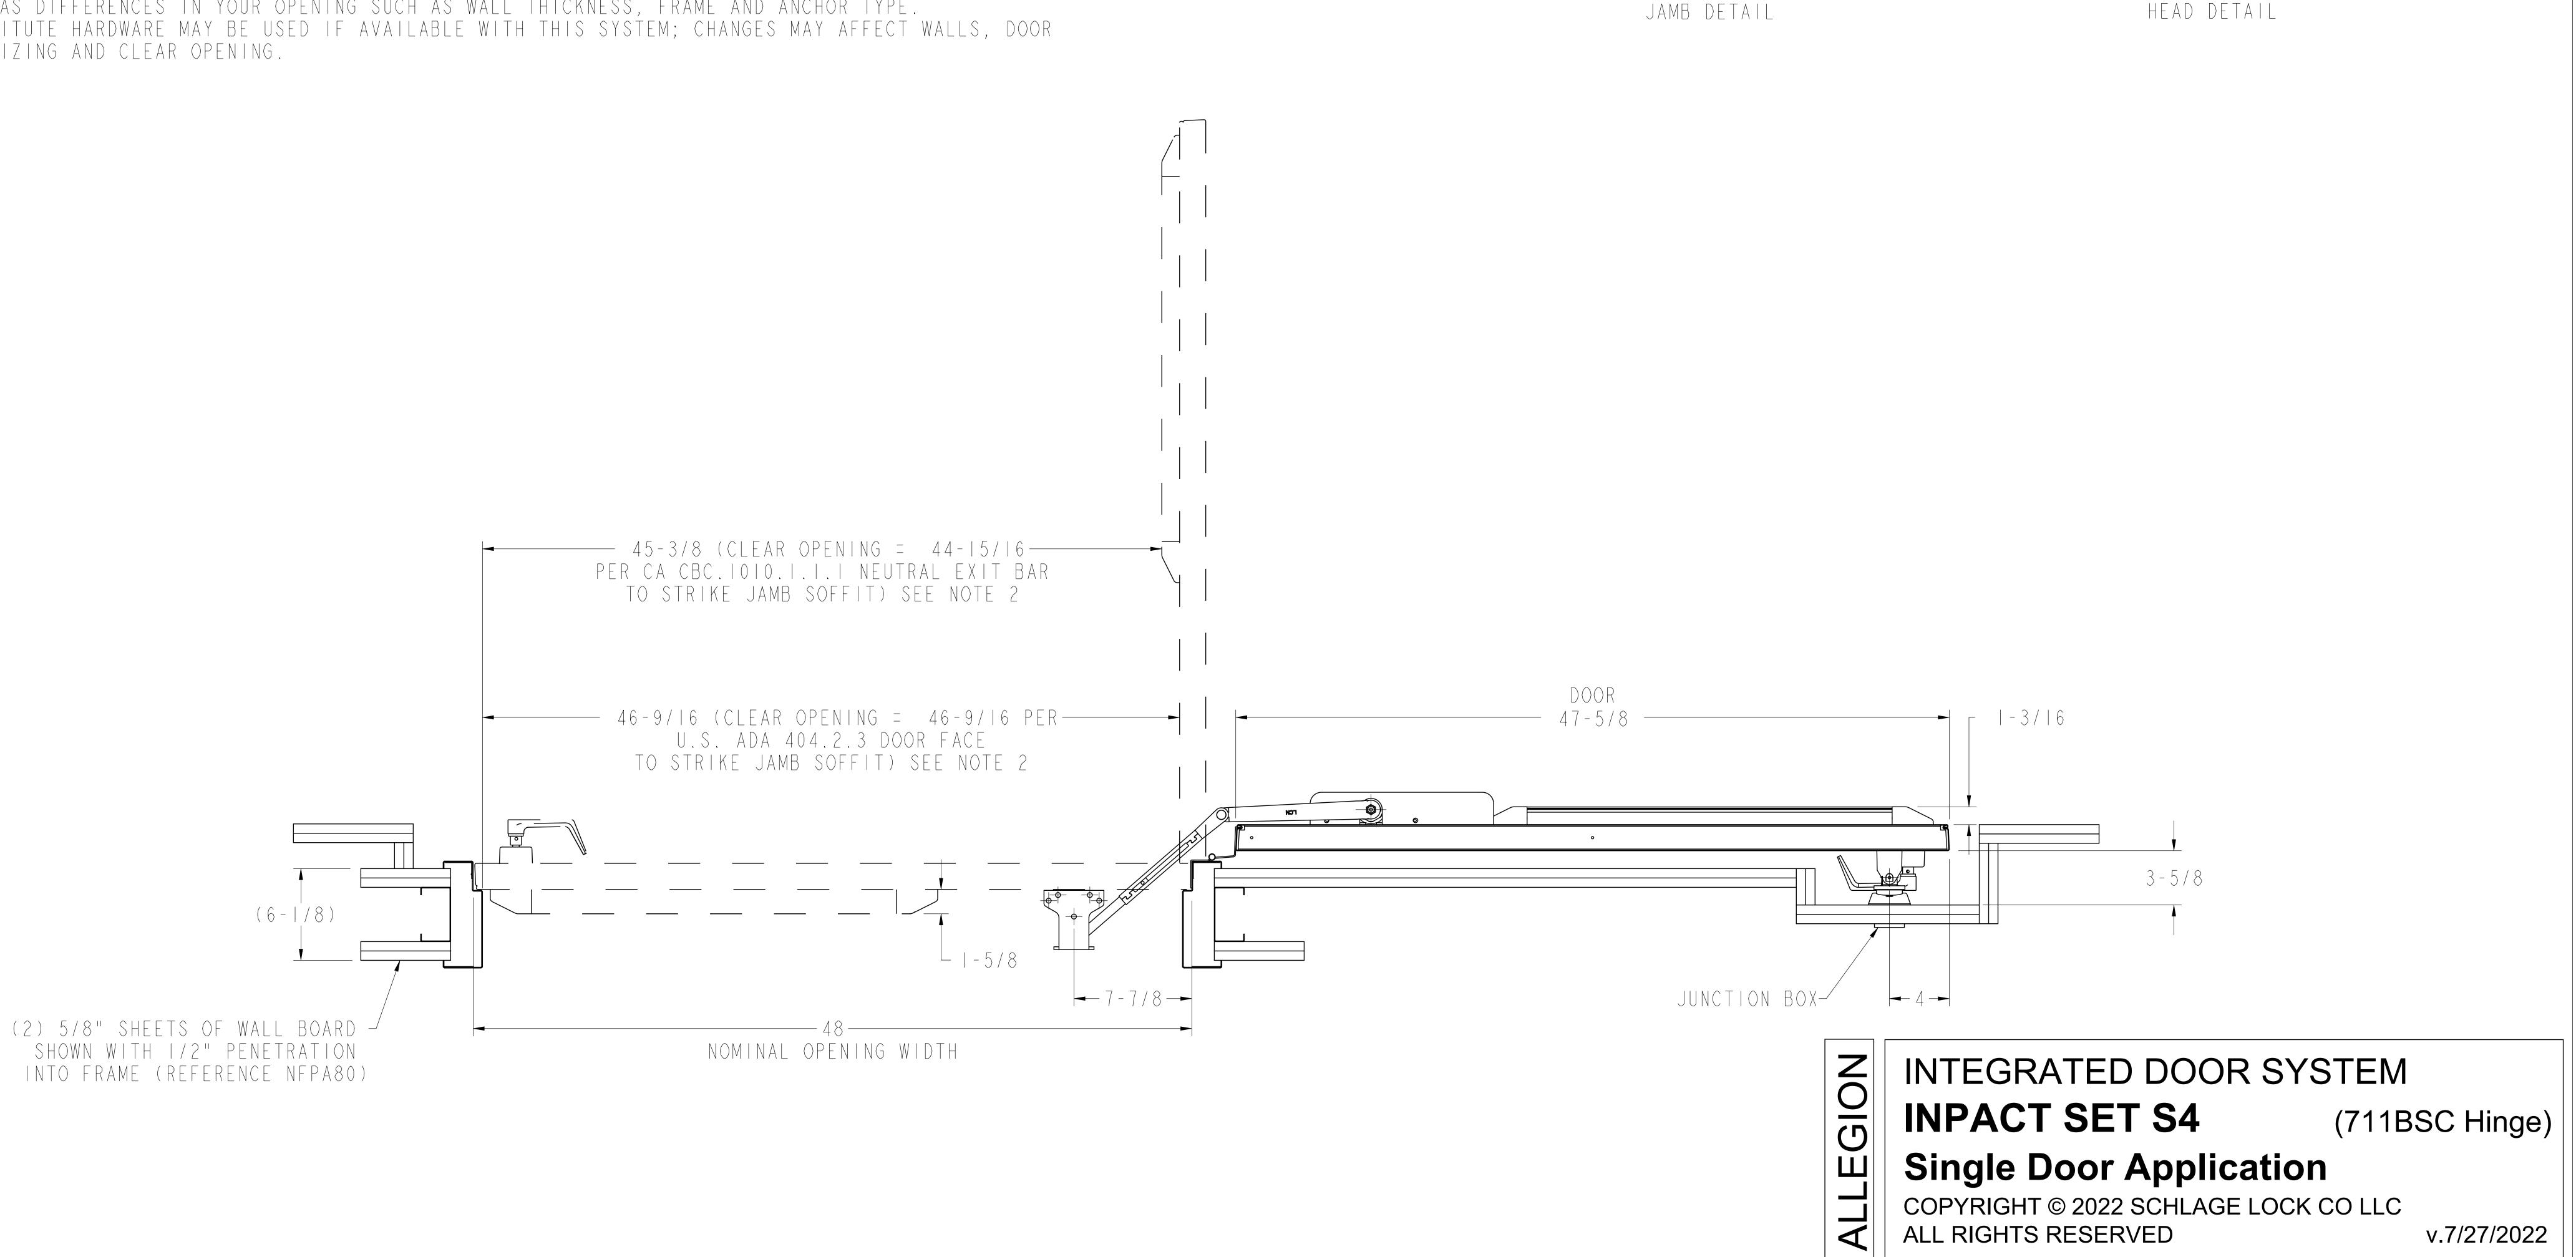

5/8 **--** | **--** 2 **---**

2-5/8-

| - | 5 / | 6

5-3/16

5/8 — 2 — = 2

2-5/8----

7-1/8 NOMINAL JAMB

DEPTH (ACTUAL 7-5/32

VARIES WITH

MATERIAL GAUGE)

|-|5/|6


5-3/16

7-1/8 NOMINAL JAMB

DEPTH (ACTUAL 7-5/32

VARIES WITH

MATERIAL GAUGE)

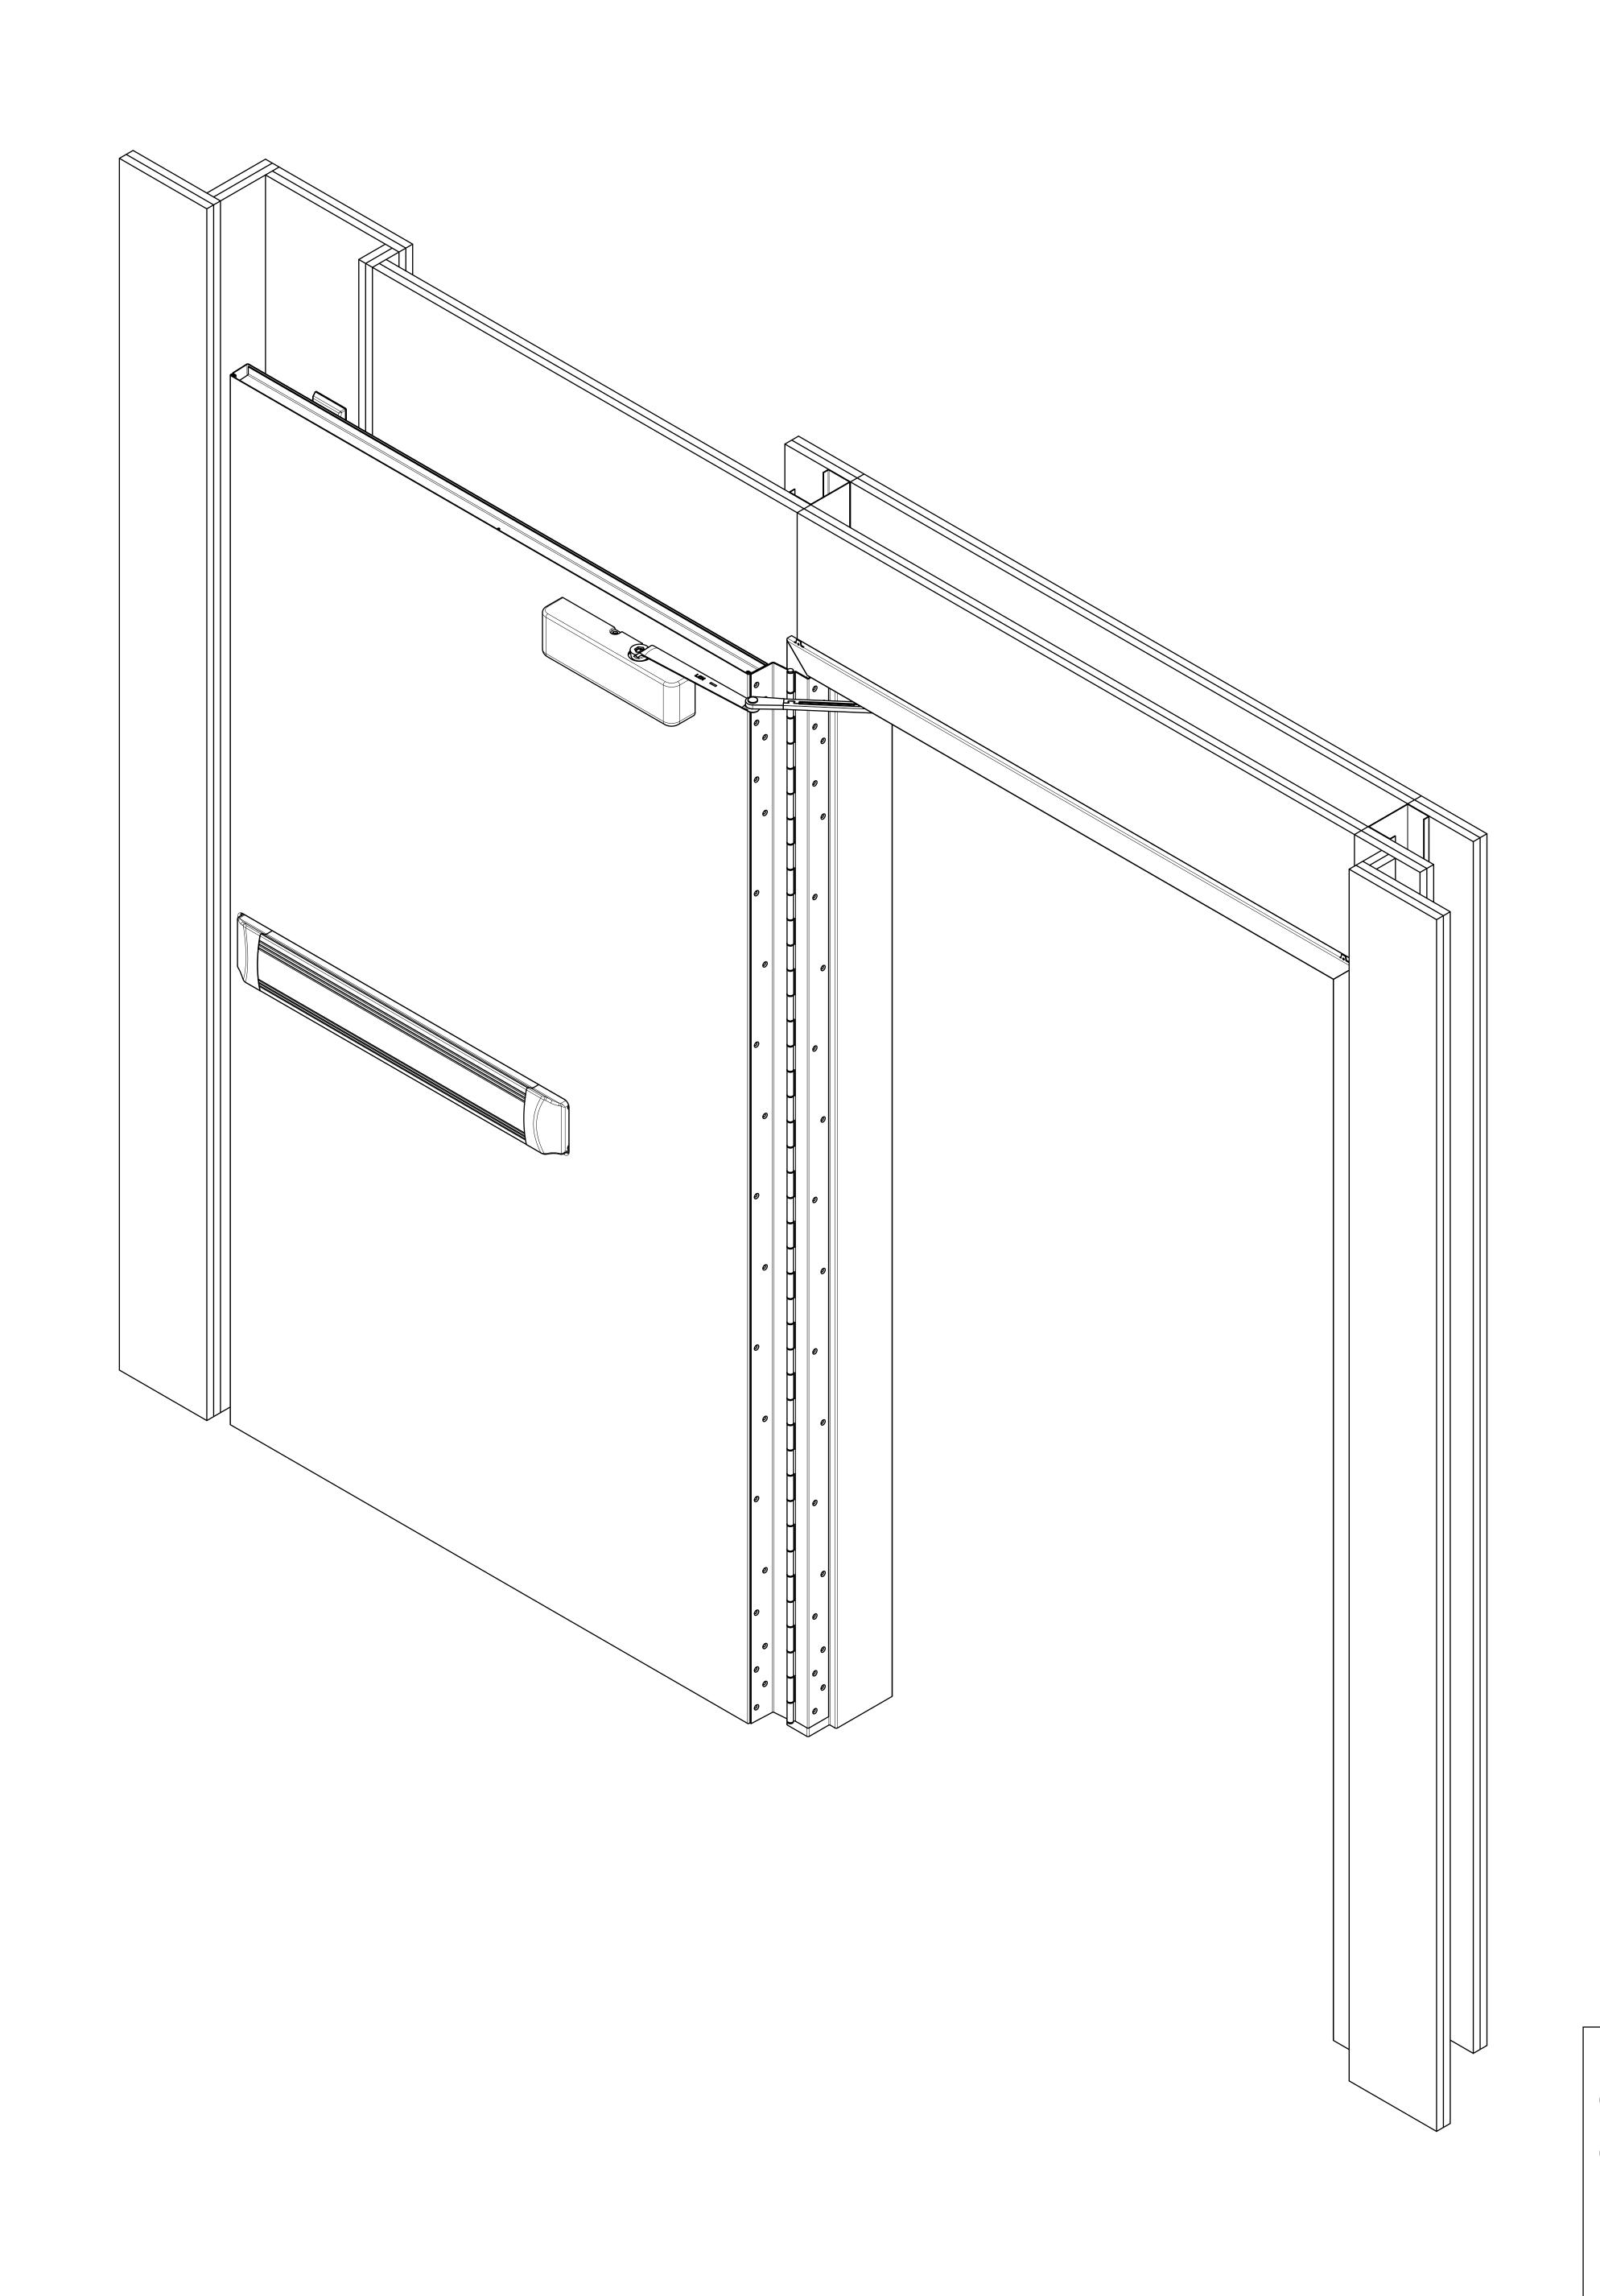

INTEGRATED DOOR SYSTEM

(711BSC Hinge)

INPACT SET S4 (711BS Single Door Application COPYRIGHT © 2022 SCHLAGE LOCK CO LLC ALL RIGHTS RESERVED

v.7/27/2022



