


NARROW LIGHT Variable Sizes

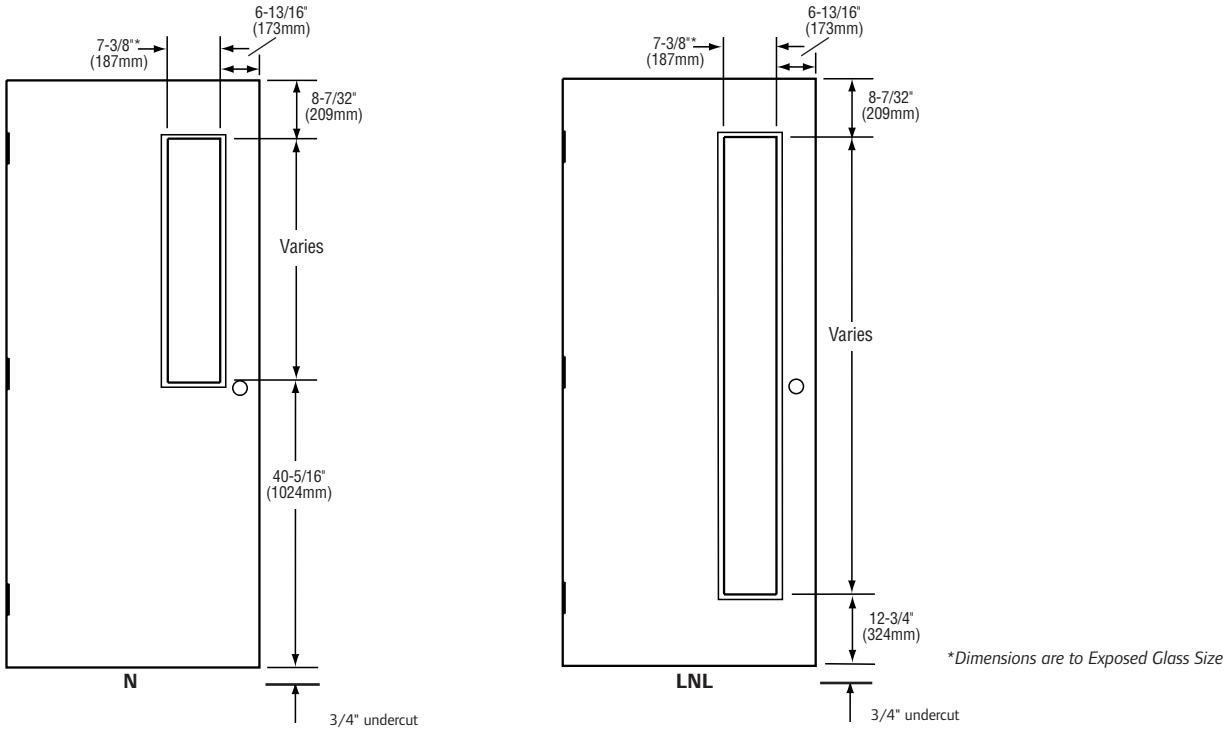

Variable Narrow Light Door Design:

Designation for a door with a long narrow light located along the lock edge of the door. The following variations in the Narrow Light designs are available as standard:

- **N Light:** door prepared for a 7 ³/₈" (191mm) wide glass light (exposed glass size) which varies in height with the door height.
- **LNL Light:** door prepared for a 7 ³/₈" (191mm) wide glass light (exposed glass size) which extends the majority of the door height, and varies in height with the door height.

Glazing Bead System:

¹/₄" (6mm) thick glass lights are available as standard with the Steelcraft Designer® trim system.

¹/₂" (13mm) thick insulated glass lights, are available as an option with the Steelcraft Designer trim system for insulated glass.

Insulated glass lights thicker than ¹/₂" (13mm) are available as an option with specially designed overlapping steel trim.

ORDERING NOMENCLATURE:

The door ordering nomenclature is suffixed with the letter:

- **N** – 7 ³/₈" (191mm) wide glass light (which varies in height with the door height).
- **LNL** – 7 ³/₈" (191mm) wide glass light (which extends the majority of the door height).

DOOR SERIES AVAILABLE:

Narrow Light kits are available for the following door series in all of their standard options and gages: L & B-Series.

Details are subject to change without prior notice.

© 2000 Steelcraft Co.

GLASS LIGHT SIZES:

The following critical dimensions apply to the standard Steelcraft N and LNL Light window designs:

Window Widths N and LNL

Exposed Glass Size	= 7 ³ / ₈ " (191mm)
Glass Cutting Size	= 8 ⁵ / ₈ " (219mm)
Door Cutout Size	= 9" (229mm)


Window Heights N

Door Heights	6'8"	7'0"	7'2"	8'0"
Exposed Glass Size	= 30 ¹ / ₂ "	34 ¹ / ₂ "	36 ¹ / ₂ "	46 ¹ / ₂ "
Glass Cutting Size	= 31 ³ / ₄ "	35 ³ / ₄ "	37 ³ / ₄ "	47 ³ / ₄ "
Door Cutout Size	= 32 ³ / ₃₂ "	36 ³ / ₃₂ "	38 ³ / ₃₂ "	48 ³ / ₃₂ "

Window Heights LNL

Door Heights	6'8"	7'0"	7'2"	8'0"
Exposed Glass Size	= 58"	62"	64"	74"
Glass Cutting Size	= 59 ¹ / ₄ "	63 ¹ / ₄ "	65 ¹ / ₄ "	75 ¹ / ₄ "
Door Cutout Size	= 59 ²¹ / ₃₂ "	63 ²¹ / ₃₂ "	65 ²¹ / ₃₂ "	75 ²¹ / ₃₂ "

GLAZING DETAILS:

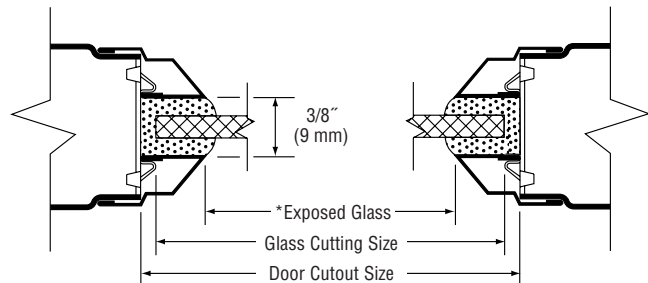

Note: For fire rated applications using ceramic type glazing, consult the glass manufacturer's glazing instructions for glass, caulking and/or glazing tape requirements. Details will vary as required by glazing selections.